



Standard Specification for Tables, Mess, Marine, Steel¹

This standard is issued under the fixed designation F 824; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last approval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This specification covers the construction of round, square, and rectangular marine mess tables with or without adjustable lee rails for use in crew, officer, and passenger dining areas aboard ship.

1.2 The values stated in inch-pound units are to be regarded as the standard. The metric equivalents, given in parentheses, are provided for information only.

2. Referenced Documents

2.1 ASTM Standards:

- A 53/A 53M Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated Welded and Seamless²
- A 167 Specification for Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip³
- A 240/A 240M Specification for Heat-Resisting Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels³
- A 366/A366M Specification for Commercial Steel (CS) Sheet, Carbon, (0.15 Maximum Percent) Cold-Rolled³
- A 500 Specification for Cold-Formed Welded and Seamless Carbon Steel Structural Tubing in Rounds and Shapes²
- A 501 Specification for Hot-Formed Welded and Seamless Carbon Steel Structural Tubing²
- A 567/A567M Specification for Castings, Iron, Cobalt, and Nickel-Base Alloy, for High Strength at Elevated Temperatures⁴
- A 569/A569M Specification for Steel, Carbon (0.15 Maximum, Percent), Hot-Rolled Sheet and Strip Commercial³
- A 582/A 582M Specification for Free-Machining Stainless Steel Bars⁵
- B 221 Specification for Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes⁶
- D 907 Terminology of Adhesives⁷

¹ This specification is under the jurisdiction of ASTM Committee F-25 on Ships and Marine Technology and is the direct responsibility of Subcommittee F25.03 on Outfitting.

Current edition approved August 15, 1993. Published October 1993. Originally published as F 824 – 83. Last previous edition F 824 – 88.

² *Annual Book of ASTM Standards*, Vol 01.01.

³ *Annual Book of ASTM Standards*, Vol 01.03.

⁴ Discontinued, see 1986 *Annual Book of ASTM Standards*, Vol 01.02.

⁵ *Annual Book of ASTM Standards*, Vol 01.05.

⁶ *Annual Book of ASTM Standards*, Vol 02.02.

⁷ *Annual Book of ASTM Standards*, Vol 15.06.

2.2 National Electrical Manufacturer's Association:

NEMA LD-3 High Pressure Decorative Laminates⁸

2.3 American Institute of Steel Construction Manual:

AISC Wire and Sheet Metal Gages— Equivalent Thickness in Decimals of an Inch, U.S. Standard Gage (USSG) for Uncoated Hot and Cold Rolled Sheets⁹

3. Terminology

3.1 Definitions of Terms Specific to This Standard:

3.1.1 *mess table*—a dining table for use in crew, officer, or passenger dining areas, consisting of a horizontal top assembly and one or more supporting pedestals.

3.1.2 *table top*—the assembled horizontal surface of the mess table including the substrate, top covering, lee rails, and edge binder, or all of the preceding.

3.1.2.1 *substrate*—the structural core of the top assembly.

3.1.2.2 *top covering*—the decorative melamine laminate attached to the top surface of the substrate.

3.1.2.3 *Lee Rails*:

(a) *fixed lee rail*—a trim piece at the edge of the table top that projects above the upper surface of the table top to retain tableware and act as an edge binder.

(b) *adjustable lee rail*—a trim piece at the edge of the table top that can be raised above the upper surface of the table top to retain tableware and can be retracted when not needed.

3.1.2.4 *edge binder*—the finishing strips of metal applied to the edge of the table top.

3.1.2.5 *cleanout*—an interruption in the raised portion of the lee rail to facilitate cleaning of table top.

3.1.2.6 *pedestal*—a round or square tubular column, or stanchion, that supports the table top. Each pedestal has a table-support plate at its upper end and provisions at the bottom for attaching to the structural deck.

(a) *table support plate*—a flanged, dished plate or flat plate with gussets welded to top of pedestal for supporting and attaching to the table top.

3.1.2.7 *deck socket*—a metal sleeve or adaptor welded to the structural deck, over which the table pedestal is installed and attached.

⁸ Available from the National Electrical Manufacturers Association, 1300 N. 17th St., Suite 1847, Rosslyn, VA 22209.

⁹ Available from the American Institute of Steel Construction, One E. Wacker Dr., Suite 3100, Chicago, IL 60601–2001.

4. Classification

4.1 Types:

- 4.1.1 *Type I*—Round mess table with single pedestal.
- 4.1.2 *Type II*—Square mess table with single pedestal.
- 4.1.3 *Type III*—Rectangular mess table.
- 4.1.3.1 *Grade 1*—Rectangular table with single pedestal.
- 4.1.3.2 *Grade 2*—Rectangular table with two pedestals.

4.2 Classes:

- 4.2.1 *Class A*—Table with fixed lee rails.
- 4.2.2 *Class B*—Table with adjustable lee rails.

5. Ordering Information

5.1 Orders for materials under this specification shall include the following:

5.1.1 Quantity and size of each type, grade, and class.

5.1.2 *Paint*:

5.1.2.1 *Color*—The purchaser shall pick from manufacturer's samples or submit a sample chip of color desired.

5.1.2.2 Manufacturer's standard baked enamel will be furnished unless otherwise required and indicated by the purchaser.

5.1.3 Color or pattern of melamine laminate top covering.

5.1.4 If pedestal deck sockets are required, they shall be specified in the ordering document; otherwise, the table manufacturer shall have the option of supplying pedestals without sockets but with 2 in. (51 mm) of scribing for trimming and welding to the deck on the ship.

5.1.5 If the total weight of the table assembly is required, it shall be requested by the purchaser.

6. Materials and Manufacture

6.1 For typical design, see Fig. 1, Fig. 2, and Fig. 3.

6.2 *Tops*:

6.2.1 Tops shall be steel construction with a decorative melamine laminate top cover. The minimum thickness for the top plate, stiffener, and edge channels shall be 16 USSG (0.0598 in. or 1.50 mm) and made from cold-rolled steel sheet of commercial quality in accordance with Specification A 366/A 366M.

6.2.2 The top cover shall be a high-pressure melamine laminate in accordance with NEMA Specification LD-3 with a maximum thickness of $\frac{1}{16}$ in. (2 mm) securely bonded to the top plate.

6.2.3 *Lee Rails, Fixed and Adjustable*, shall be anodized aluminum alloy 6063-T1 in accordance with Specification B 221. Studs for attaching to table top shall be Type 300 stainless steel in accordance with Specification A 582/A 582M.

6.2.4 *Edge Binder for Tables with Adjustable Lee Rails*, shall be flush with top of table and may be either anodized aluminum alloy 6063-T1 in accordance with Specification B 221 or polished Type 300 stainless steel in accordance with Specification A 240/A 240M, at the option of table manufacturer.

6.2.5 *Cleanouts*, shall be provided as indicated in Figs. 1-3.

6.3 *Pedestals*:

6.3.1 Pedestal quantity and sizes shall be as specified in Tables 1-6 as illustrated in Figs. 1-3. Commercially acceptable tolerances as specified in Specifications A 53/A 53M, A 500, or

A 501 shall apply to all pedestal dimensions. Pedestals shall be of either welded or seamless construction. The choice of round or square pedestal shall be at the option of the table manufacturer. Round pedestals shall be black steel pipe in accordance with Specification A 53/A 53M. Square pedestals shall be structural-steel tubing in accordance with Specifications A 500 or A 501.

6.3.2 *Table Support Plate*, may be either a flanged dished plate or a flat plate with gussets. If a flat plate and gussets, it shall be of hot-rolled, commercial-quality steel pickled and oiled in accordance with Specification A 567/A 567M and with a minimum thickness of 7 USSG (0.1793 in. or 5 mm). For dished plate, it shall be cold-rolled steel sheet of commercial quality in accordance with Specification A 366/A 366M and with a minimum thickness of 14 USSG (0.0747 in. or 2 mm).

6.3.3 Pedestals may be attached to the deck by welding or by attaching to deck socket. Unless specified in the ordering document, the method used is at the option of the table manufacturer. If round pedestals and sleeves are used, provisions must be made to ensure that the table will not turn.

6.4 *Joining*:

6.4.1 *Metal Components*, shall be joined by welding or gluing with a structural adhesive as defined in Terminology D 907.

6.4.2 Joining shall be adequate to prevent racking during manufacture or service.

6.4.3 *Spotwelds*, shall be spaced approximately 3 in. (76 mm) on centers.

6.4.4 *Visible Spotwelds*, higher than the general surface of the adjacent metal, shall be ground smooth.

6.4.5 *Visible Spotweld Depressions*, shall be spot filled and ground flush.

7. Performance Requirements

7.1 Tops for mess tables shall be capable of supporting a load of 400 lb (181 kg) uniformly distributed over an area of 2 ft² (0.12 m²) and placed at any location on the top. Load shall remain on top for a minimum of 3 min, and there shall be no indication of permanent set after removal of load.

8. Dimensions

8.1 For dimensions of tables and pedestals, see Figs. 1-3 and Tables 1-6.

9. Workmanship, Finish, And Appearance



9.1 All workmanship and material shall be of specified quality in keeping with the best commercial marine practice so as to produce each item suitable for its intended use.

9.2 All exposed burrs, raw, or sharp edges which might be injurious to personnel shall be removed.

9.3 Depressions considered unacceptable for the product's end use shall be spot filled and sanded flush.

9.4 *Finish*:

9.4.1 All steel surfaces, unless corrosion resistant or with a corrosion-resistant plating, shall be painted so as to prevent corrosion.

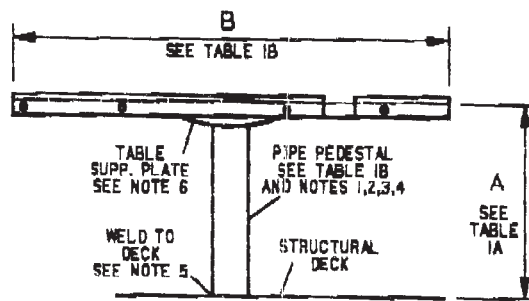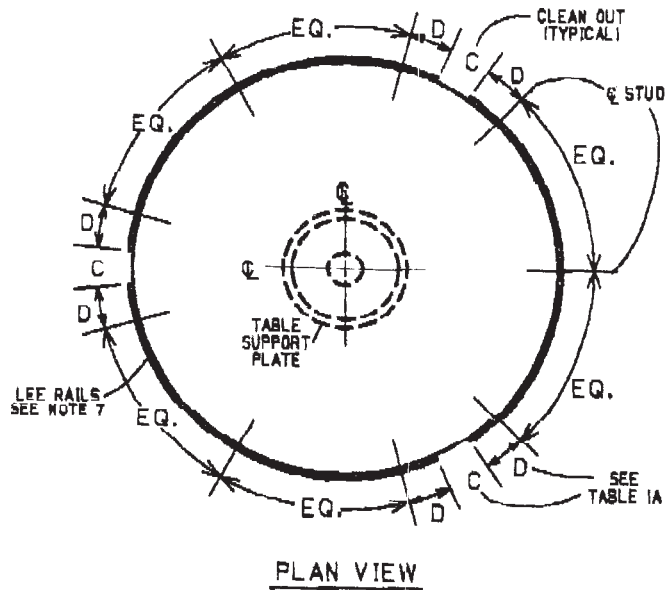

ELEVATION

NOTE 1—Commercially acceptable tolerances, as specified in applicable ASTM specifications listed in Notes 3 and 4, shall apply to all pedestal dimensions listed.

NOTE 2—Unless otherwise specified in the ordering documents, pedestal sizes shall be chosen from Table 2, Table 4, and Table 6 shown with Figs. 1-3, respectively. The choice of round or square pedestals shall be at the option of the table manufacturer.

NOTE 3—Round pedestals shall be black steel pipe in accordance with Specification A 53/A 53M.

NOTE 4—Square pedestals shall be hot-formed structural steel tubes in accordance with Specification A 501.

NOTE 5—In Figs. 1-3, pedestal is shown welded directly to the structural deck. Unless otherwise specified in the ordering documents, the table manufacturer shall have the option of providing pedestals for welding to deck as shown or providing deck sleeves for attaching pedestal to deck and pedestal.

NOTE 6—The table support plate, welded to the top of the pedestal, may be either a flanged, dished plate or a plate with gussets at the option of the table manufacturer.

NOTE 7—Lee rails, fixed and adjustable, shall be anodized aluminum alloy 6063-T1 per Specification B 221. Studs for attaching to table top shall be Type 300 stainless steel per Specification A 582/A 582M.

FIG. 1 Round Mess Table (Type I)

9.4.2 Unless otherwise required by the ordering documents, all normally visible parts of the completed unit shall have the manufacturer's standard baked-on enamel finish.

9.4.3 Color to be specified in the ordering documents.

10. Inspection and Certification

10.1 The manufacturer shall inspect and certify that the item of furniture complies with the furniture specification and the loading requirements as defined in Section 7.



11. Packaging And Package Marking

11.1 Each item shall be marked in accordance with the purchase order.



11.2 Packaging shall be provided and shall be acceptable to a common carrier.

12. Keywords

12.1 marine furniture; marine mess tables; mess tables; ship dining areas

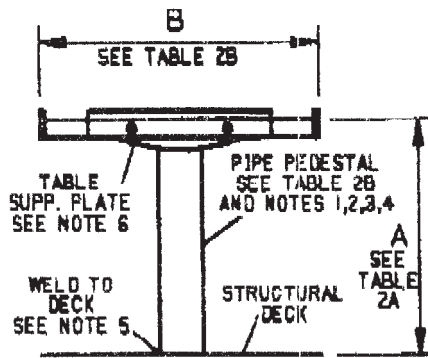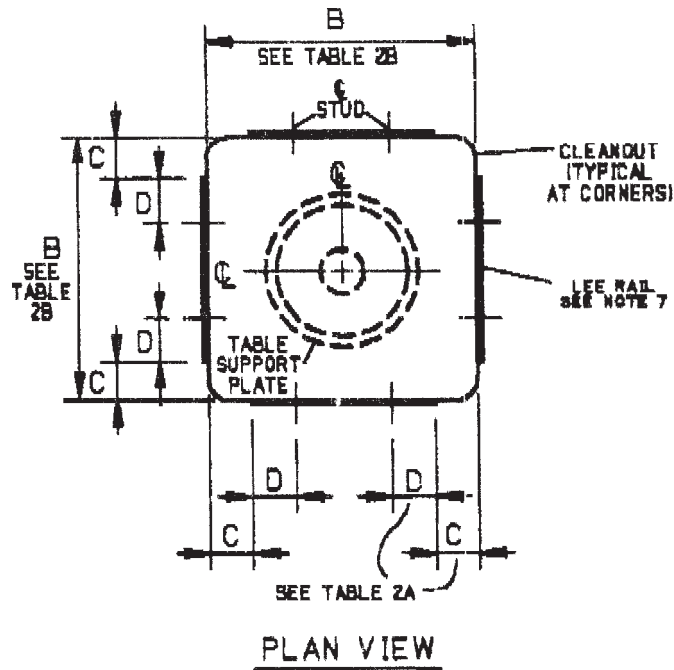

NOTE 1—See Notes 1 through 7 under Fig. 1.
 FIG. 2 Square Mess Table (Type II)

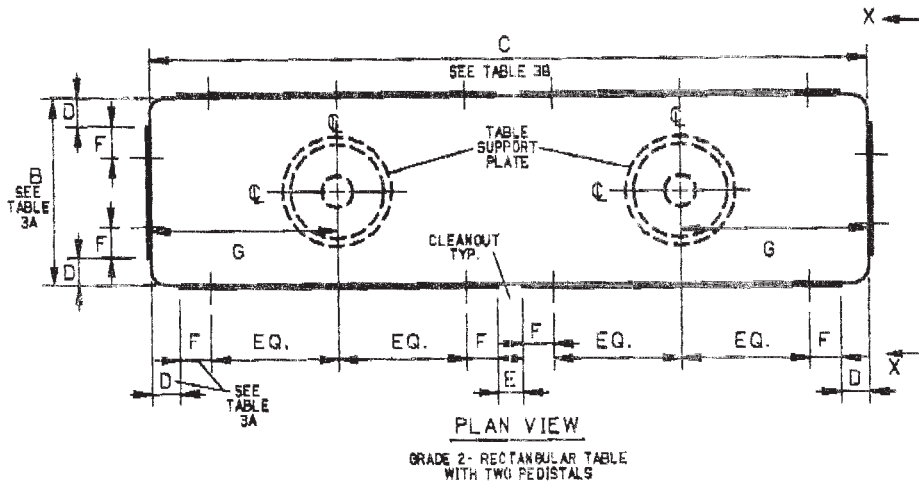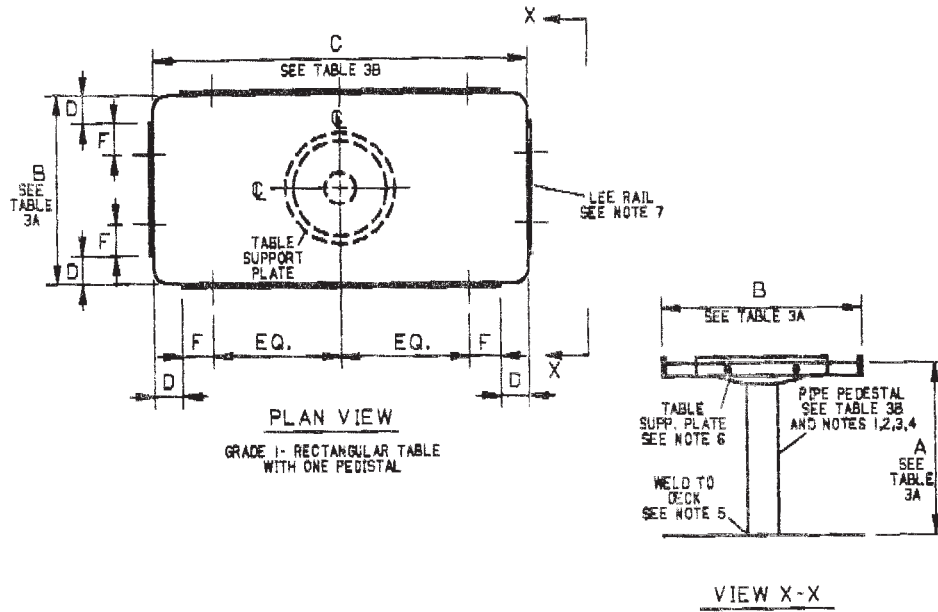

NOTE 1—See Notes 1 through 7 under Fig. 1.

FIG. 3 Rectangular Mess Table (Type III)

TABLE 1 Miscellaneous Dimensions—Round Table

| Designation | | in. | | mm | |
|--------------------|---|-----------|-----------|-----------|-----------|
| | | Dimension | Tolerance | Dimension | Tolerance |
| Table height | A | 29 | 1/16 | 736 | 2 |
| Table diameter | B | | | | |
| Cleanout (typical) | C | 3 | 1/16 | 76 | 2 |
| Stud locations | D | 4 | 1/16 | 102 | 2 |

TABLE 2 Table and Pedestal Sizes—Round Table

| Round Table Size (B) | | Pedestal Size (See Note 1 and Note 2) | | | | |
|----------------------------|----------------------|---------------------------------------|----------------------------|--------------------------|--------------------------------------|--------------------------|
| Outside Diameter, in. (mm) | Tolerances, in. (mm) | Round Steel Pipe (See Note 3) | | | Square Steel Tubing (See Note 4) | |
| | | Nominal Size | Outside Diameter, in. (mm) | Wall Thickness, in. (mm) | Dimension Across Flat Side, in. (mm) | Wall Thickness, in. (mm) |
| 36 (914) | 1/16(2) | 4 in. Schedule 40 | 4½(114) | 0.237 (6) | 4 by 4 (102 by 102) | 0.250 (6) |
| 48 (1219) | 1/16(2) | 6 in. Schedule 40 | 6⅝(168) | 0.280 (7) | 6 by 6 (152 by 152) | 0.250 (6) |
| 60 (1524) | 1/16(2) | 8 in. Schedule 40 | 8⅝(219) | 0.322 (8) | 8 by 8 (203 by 203) | 0.188 (5) |

TABLE 3 Miscellaneous Dimensions—Square Table

| Designation | | in. | | mm | |
|--------------------|---|-----------|-----------|-----------|-----------|
| | | Dimension | Tolerance | Dimension | Tolerance |
| Table height | A | 29 | 1/16 | 736 | 2 |
| Table size | B | | | | |
| Cleanout (typical) | C | 2 | 1/16 | 51 | 2 |
| Stud locations | D | 4 | 1/16 | 102 | 2 |

TABLE 4 Table and Pedestal Sizes—Square Table

| Square Table Size (B) | | Pedestal Size (See Note 1 and Note 2) | | | | |
|------------------------------|----------------------|---------------------------------------|----------------------------|--------------------------|--------------------------------------|--------------------------|
| Dimension Of Sides, in. (mm) | Tolerances, in. (mm) | Round Steel Pipe (See Note 3) | | | Square Steel Tubing (See Note 4) | |
| | | Nominal Size | Outside Diameter, in. (mm) | Wall Thickness, in. (mm) | Dimension Across Flat Side, in. (mm) | Wall Thickness, in. (mm) |
| 30 by 30 (762 by 762) | 1/16(2) | 4 in. Schedule 40 | 4½ (114) | 0.237 (6) | 4 by 4 (102 by 102) | 0.250 (6) |
| 36 by 36 (914 by 914) | 1/16(2) | 6 in. Schedule 40 | 6⅝ (168) | 0.280 (7) | 6 by 6 (152 by 152) | 0.250 (6) |

TABLE 5 Miscellaneous Dimensions—Rectangular Table

| Designation | | in. | | mm | |
|-------------------|---|-----------|-----------|-----------|-----------|
| | | Dimension | Tolerance | Dimension | Tolerance |
| Table height | A | 29 | 1/16 | 736 | 2 |
| Table width | B | 30 | 1/16 | 762.0 | |
| Table length | C | | | | |
| Corner cleanouts | D | 2 | 1/16 | 51 | 2 |
| Side cleanouts | E | 3 | 1/16 | 76 | 2 |
| Stud locations | F | 4 | 1/16 | 102 | 2 |
| Pedestal location | G | 24 | 1/16 | 610 | 2 |

TABLE 6 Table and Pedestal Sizes—Rectangular Table

| Grade | Rectangular Table | | Pedestal Size (See Note 1 and Note 2) | | | | |
|-------|---------------------|------------------------|---------------------------------------|----------------------------------|-----------------------------|--|-----------------------------|
| | Length (C) | | Round Steel Pipe (See Note 3) | | | Square Steel Tubing (See Note 4) | |
| | Length, in. (mm) | Tolerance, in. (mm) | Nominal Size | Outside Diameter, in. (mm) | Wall Thickness, in. (mm) | Dimension Across Flat Side, in. (mm) | Wall Thickness, in. (mm) |
| 1 | 48 (219) | 1/16 (2) | 6 in. Schedule 40 | 6 5/8 (168) | 0.280 (7) | 6 by 6 (152 by 152) | 0.250 (6) |
| 2 | 72 (1829) | 1/16 (2) | 4 in. Schedule 40 | 4 1/2 (114) | 0.237 (6) | 4 by 4 (102 by 102) | 0.250 (6) |
| 2 | 96 (2348) | 1/16 (2) | 4 in. Schedule 40 | 4 1/2 (114) | 0.237 (6) | 4 by 4 (102 by 102) | 0.250 (6) |
| 2 | 120 (3048) | 1/16 (2) | 4 in. Schedule 40 | 4 1/2 (114) | 0.237 (6) | 4 by 4 (102 by 102) | 0.250 (6) |

The American Society for Testing and Materials takes no position respecting the validity of any patent rights asserted in connection with any item mentioned in this standard. Users of this standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, are entirely their own responsibility.

This standard is subject to revision at any time by the responsible technical committee and must be reviewed every five years and if not revised, either reapproved or withdrawn. Your comments are invited either for revision of this standard or for additional standards and should be addressed to ASTM Headquarters. Your comments will receive careful consideration at a meeting of the responsible technical committee, which you may attend. If you feel that your comments have not received a fair hearing you should make your views known to the ASTM Committee on Standards, at the address shown below.

This standard is copyrighted by ASTM, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA 19428-2959, United States. Individual reprints (single or multiple copies) of this standard may be obtained by contacting ASTM at the above address or at 610-832-9585 (phone), 610-832-9555 (fax), or service@astm.org (e-mail); or through the ASTM website (www.astm.org).