



Designation: F 548 – 03a

Standard Test Method for Intensity of Scratches on Aerospace Transparent Plastics¹

This standard is issued under the fixed designation F 548; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reappraisal. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reappraisal.

1. Scope

1.1 This test method covers the visual inspection of shallow or superficial scratches on the surface of aerospace transparent plastic materials.

1.2 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

2. Summary of Test Method

2.1 A visual comparison is made between a set of graded scratch standards and the scratch on the plastic material to determine the relative intensity of the scratch.

3. Significance and Use

3.1 Scratches exist on all transparent plastic surfaces. Usually they are very fine scratches from cleaning operations that are not visible when looking through the plastic. Deeper scratches may result from careless cleaning or handling. While these may not be deep enough to affect the structural integrity of the part, their appearance in certain locations may be distracting to the observer looking through the plastic. Therefore, a procedure to define these scratches is useful.

4. Reference Materials

NOTE 1—The committee is in the process of developing new visual comparison standards. Adjuncts are not currently available.

5. Procedure

5.1 Place the part in a suitable inspection position. This may be horizontal on a padded table, vertical against a neutral background, or at an angle. The scratched surface shall be toward the observer. The light level shall be a minimum of 80 lux. Either natural or artificial light may be used. Place the scratch in the visual comparison standard beside and parallel to the scratch on the plastic material. Rotate the part or viewing angle to get the best definition of the scratch. Disregarding the length of the scratch on the plastic material and on the standard, select and record the highest standard scratch that most clearly matches the appearance of the scratch on the plastic material. Measure and record the length of the scratch to the nearest 1 mm (0.04 in.).

6. Interpretation

6.1 Customer specifications for transparent plastic materials and parts may detail allowable frequency, location, length, and standard number for scratches and they may assign maximum scratch limits for critical and noncritical optical viewing areas.

7. Report

7.1 For each scratch within the scope of the plastic scratch standard, report its standard number, length, frequency, and location.

8. Precision and Bias

8.1 Precision:

8.1.1 The repeatability of judging the intensity of a scratch within one scratch value, for the same observer, is 92 % or better.

8.1.2 The reproducibility (between observers) of judging the intensity of a scratch within one scratch value is 90 % or better for scratch values 14 and above. The reproducibility of judging the intensity of a scratch within two scratch values is 92 % or better for scratch values below 14. The data reflect that it is more difficult to judge finer scratches.

8.2 *Bias*—The procedure in this test method has no bias because the scratch intensity is defined only in terms of the test method.

¹ This test method is under the jurisdiction of ASTM Committee F07 on Aerospace and Aircraft and is the direct responsibility of Subcommittee F07.08 on Transparent Enclosures and Materials.

Current edition approved Apr. 10, Oct. 1, 2003. Published May November 2003. Originally published in 1981. Last previous edition approved in 2004³ as F 548 - 04³.

9. Keywords

9.1 comparison standard; scratches; transparent plastic

APPENDIX


(Nonmandatory Information)

X1. COMPARISON OF GLASS AND PLASTIC SCRATCH RATINGS

X1.1 A study was performed to determine equivalent relationships between glass and plastic scratch adjuncts. This empirically defined relationship can be used if needed when: (1) only glass adjuncts are available to judge the intensity of scratches in plastic, (2) only plastic adjuncts are available to judge the intensity of the scratches in glass, or (3) it is desirable to convert between the glass and plastic scales.

X1.2 Five trained observers rated eight glass and eight plastic scratches. Each scratch was rated using both glass and plastic adjuncts three times. The 96 trials for each observer were randomized with the constraint that there be at least five trials between replications of the same scratch and either glass or plastic adjunct. Fig. X1.3 shows the number of trials for each observer and scratch having a particular scratch rating.

X1.3 Fig. X1.1 contains the estimated relationship between the glass (G) and plastic (P) scratch ratings and between the plastic and glass ratings. Table X1.1 and Fig. X1.2 contain shows the mean scratch rating number of trials for each observer and scratch having a particular scratch rating when compared with either glass or plastic adjunct.

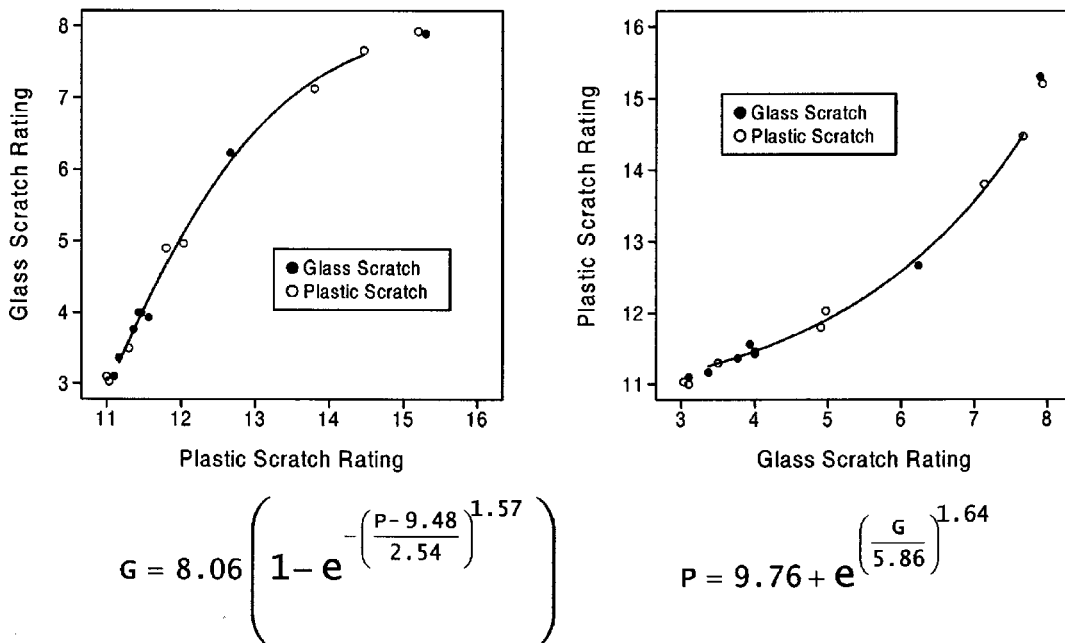

NOTE—The 3 means near (P = 11, G = 3) and the 2 means near (P = 15, G = 8) were not used since they contained multiple trials where the glass rating was either 3- or 8+.

FIG. X1.1 Non-Linear Regression Fit of Mean Scratch Ratings (N = 15)

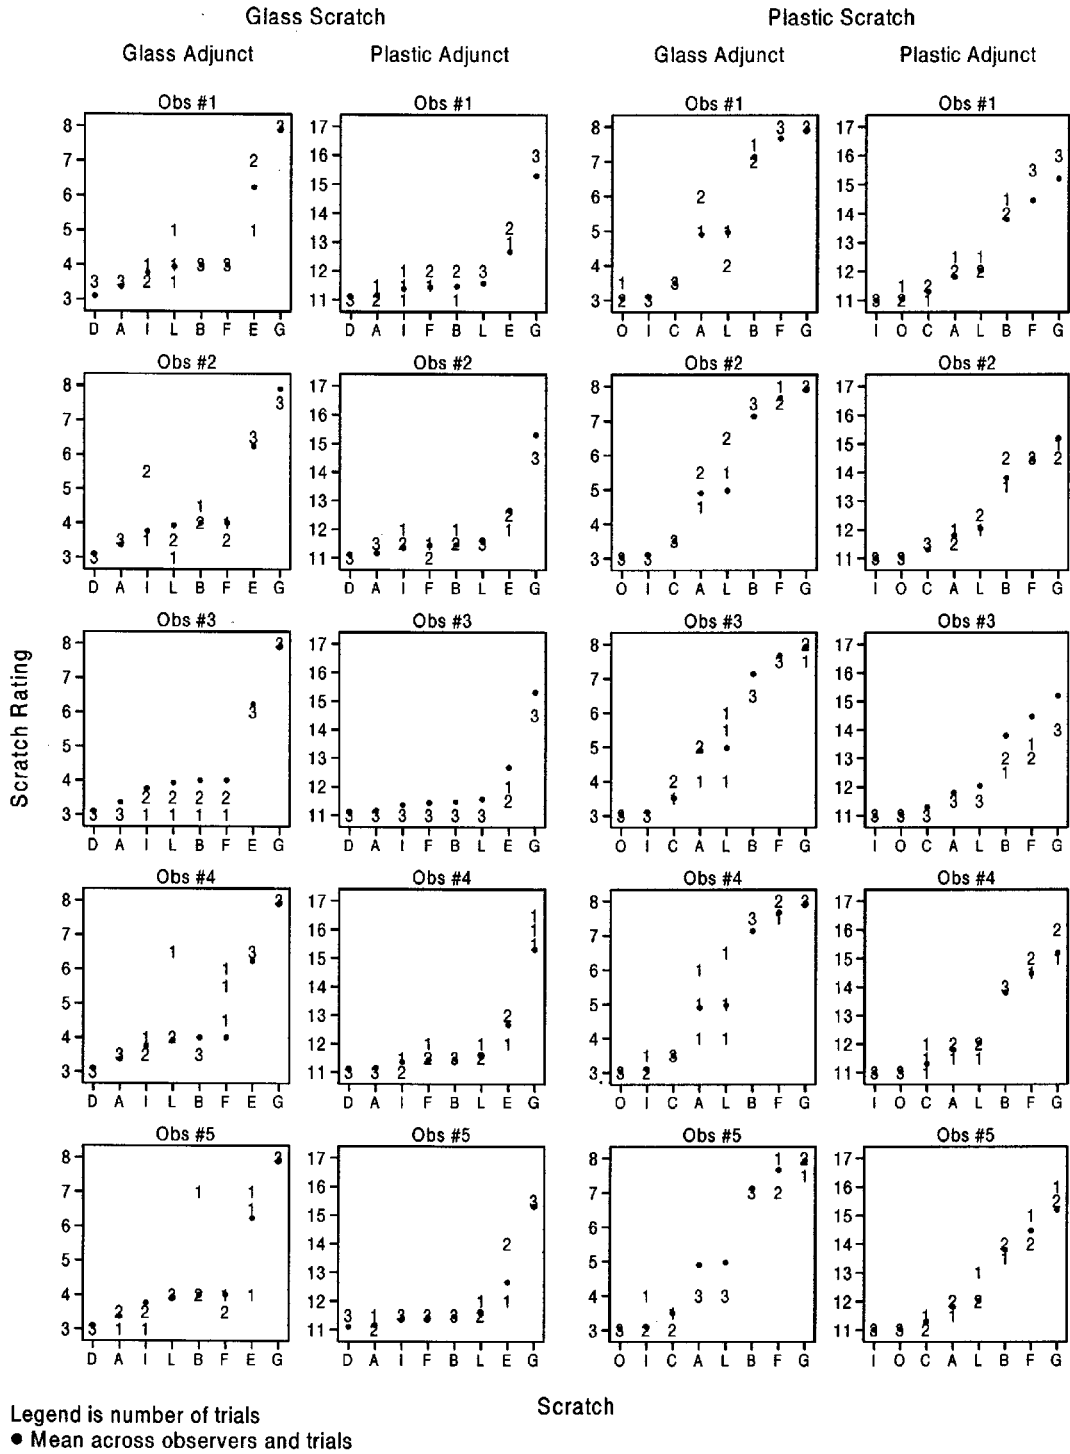


FIG. X1.32 Number of Trials for Each Observer and Scratch (N = 3) Having a Particular Scratch Rating when Compared with Either Glass or Plastic Adjunct

ASTM International takes no position respecting the validity of any patent rights asserted in connection with any item mentioned in this standard. Users of this standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, are entirely their own responsibility.

This standard is subject to revision at any time by the responsible technical committee and must be reviewed every five years and if not revised, either reapproved or withdrawn. Your comments are invited either for revision of this standard or for additional standards and should be addressed to ASTM International Headquarters. Your comments will receive careful consideration at a meeting of the responsible technical committee, which you may attend. If you feel that your comments have not received a fair hearing you should make your views known to the ASTM Committee on Standards, at the address shown below.

 **F 548 – 03a**

This standard is copyrighted by ASTM International, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA 19428-2959, United States. Individual reprints (single or multiple copies) of this standard may be obtained by contacting ASTM at the above address or at 610-832-9585 (phone), 610-832-9555 (fax), or service@astm.org (e-mail); or through the ASTM website (www.astm.org).