



Designation: D 1120 – 94 (Reapproved 1998)<sup>e1</sup>

## Standard Test Method for Boiling Point of Engine Coolants<sup>1</sup>

This standard is issued under the fixed designation D 1120; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon ( $\epsilon$ ) indicates an editorial change since the last revision or reapproval.

*This standard has been approved for use by agencies of the Department of Defense.*

<sup>e1</sup> NOTE—The last sentence was added to 4.3 editorially in May 2003.

### 1. Scope

1.1 This test method covers the determination of the equilibrium boiling point of engine coolants. The equilibrium boiling point indicates the temperature at which the sample will start to boil in a cooling system under equilibrium conditions at atmospheric pressure.

NOTE 1—Engine coolants may also be marketed in a ready-to-use form (prediluted). This test procedure is applicable to diluted solutions as well as to concentrates.

NOTE 2—The procedure for obtaining a representative test sample of a coolant solution that contains an antileak additive is found in Test Method D 1176.

1.2 The values stated in SI units are to be regarded as standard. The values given in parentheses are for information only.

1.3 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

### 2. Referenced Documents

#### 2.1 ASTM Standards:

D 1176 Test Method for Sampling and Preparing Aqueous Solutions of Engine Coolants or Antirusts for Testing Purposes<sup>2</sup>

E 1 Specification for ASTM Thermometers<sup>3</sup>

### 3. Summary of Test Method

3.1 Sixty millilitres (two ounces) of the sample are boiled under equilibrium conditions at atmospheric pressure in a 100-mL flask. The temperature of the liquid corrected for barometric pressure is the boiling point.

<sup>1</sup> This test method is under the jurisdiction of ASTM Committee D-15 on Engine Coolants and is the direct responsibility of Subcommittee D15.03 on Physical Properties.

Current edition approved July 15, 1994. Published September 1994. Originally published as D 1120 – 50 T. Last previous edition D 1120 – 93.

<sup>2</sup> *Annual Book of ASTM Standards*, Vol 15.05.

<sup>3</sup> *Annual Book of ASTM Standards*, Vol 14.03.

### 4. Apparatus (Fig. 1)

4.1 *Flask*—A 100-mL round-bottom, short-neck, heat-resistant glass flask having a neck with a  $1/8$  standard-taper, female ground-glass joint and a 10-mm (0.4-in) outside diameter side-entering tube, so located as to permit the end of the thermometer bulb to be directly centered in the flask 6.5 mm (0.26 in.) from the bottom.<sup>4</sup> The flask is shown in Fig. 2.

4.2 *Condenser*—The condenser shall be of the water-cooled, reflux, glass-tube type, having a condenser jacket 200 mm (7.9 in.) in length. The bottom end of the condenser shall have a  $1/8$  standard-taper, drip-tip, male ground-glass joint.

4.3 *Boiling Stones*—Three or four silicon carbide grains,<sup>5</sup> grit No. 8 or other suitable inert chips, shall be used for each determination. For samples exhibiting heavy foam, more boiling chips may be added.

4.4 *Thermometer*—An ASTM Partial Immersion Thermometer, having a range from  $-5$  to  $+300^{\circ}\text{C}$  ( $20$  to  $580^{\circ}\text{F}$ ) and conforming to the requirements for Thermometer 2C or 2F, as prescribed in Specification E 1.

4.5 *Heat Source*—A suitable electric heating mantle shall be used, such that sufficient heat can be obtained to comply with the heating and refluxing rates specified in Section 7.

### 5. Sample

5.1 To obtain a sample of unused concentrated coolant for boiling point determination, the following procedure is suggested:

5.1.1 Allow material as received in the original container to come to room temperature ( $20^{\circ}\text{C}$  ( $68^{\circ}\text{F}$ ) but not below  $20^{\circ}\text{C}$  minimum).

5.1.2 Shake the container to mix any material that may have separated.

5.1.3 Immediately remove desired sample for test requirement.

<sup>4</sup> The short-neck flask shown in Fig. 2 can be purchased from S.G. & P. Inc., PO Box 2518, Freeport, TX 77541, Tel: (409) 233-7491, or Ace Glass Inc., 1430 Northwest Blvd., Vineland, NJ 08360, Tel: (800) 223-4524.

<sup>5</sup> Silicon carbide grains, grit No. 8, may be obtained from Electro Minerals Co. (US) Inc. P.O. Box 423 Niagara Falls, NY 14302. Product No: 1242-0008-3-8RA.


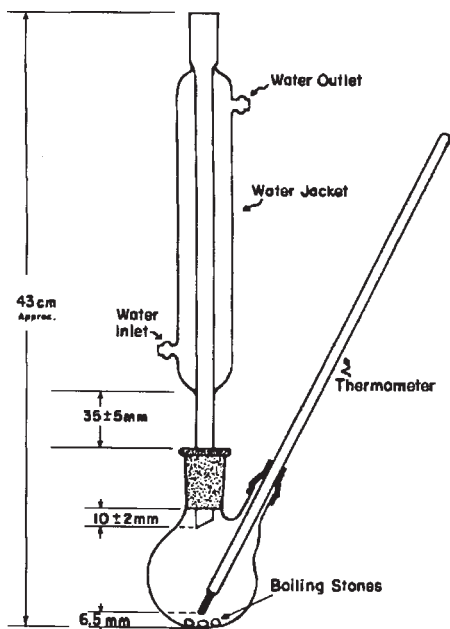


FIG. 1 Boiling Point Test Apparatus

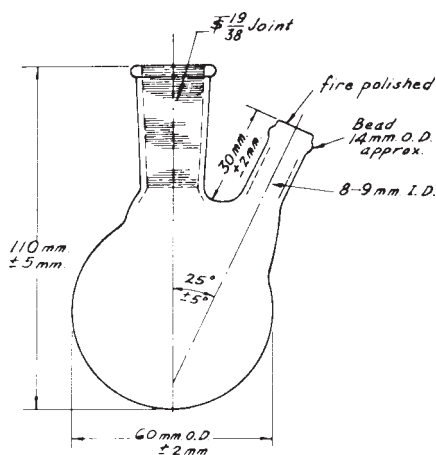

100 ml. Flask  
FIG. 2 Short-Neck Flask, 100 mL

5.2 To prepare a dilute solution of any mixture, thoroughly mix the sample, pipet the required volume into a calibrated volumetric flask, and add distilled water to bring the mixed contents of the flask to the proper volume while maintaining the calibration temperature.

5.3 The procedure for obtaining a representative test sample of a coolant solution that contains an antileak additive is found in Test Method D 1176.

## 6. Preparation of Apparatus

6.1 Use a calibrated thermometer.

6.2 Insert the calibrated thermometer through the side tube until the tip of the bulb is 6.5 mm (0.26 in.) from the bottom of the center of the flask. Make a seal around the thermometer with a short piece of rubber tubing or other suitable material.

6.3 Place 60 mL (2 oz) of the sample to be tested, together with three or four silicon carbide grains, into the flask.

6.4 Attach the chemically cleaned condenser to the flask and mount the flask in an appropriate heating mantle. Support the glassware by a laboratory-type ring support and stand. The whole assembly is held in place by a clamp. Connect the cooling water inlet and outlet tubes to the condenser.

## 7. Procedure

7.1 When assembled as shown in Fig. 1, turn on the condenser water and apply heat by means of an electric heater at such a rate that the sample is brought to its boiling point within 15 min. Heat strongly until boiling is reached and then reduce heat input slowly until the required reflux rate is obtained. Adjust the rate of reflux over the next 10-min period to 1 to 2 drops of reflux per second. To obtain accurate results, it is important to carefully observe the specified reflux rate and maintain the proper reflux rate for 2 min before reading the temperature.

7.2 Record the observed temperature and the barometric pressure.

## 8. Calculation

8.1 *Thermometer Inaccuracy*—Correct the observed temperature by applying the correction factor obtained in calibrating the thermometer for inaccuracy (6.1).

8.2 *Variation from Standard Barometric Pressure*—This correction shall be applied to the observed temperature after correction for inaccuracy of the thermometer. Use Table 1 to determine the barometric correction.

## 9. Report

9.1 Report the following information:

9.1.1 The equilibrium boiling point as the observed temperature rounded off to the nearest 0.3°C (0.5°F), corrected for thermometer inaccuracy and barometric pressure.

## 10. Precision and Bias

10.1 *Precision*:

10.1.1 *Reproducibility* — For diluted samples boiling below 100°C (212°F), results should not differ from each other by more than 1.4°C (2.5°F) and, for samples boiling above 100°C (212°F), results should not differ from each other by more than 2.5°C (4.5°F).

TABLE 1 Corrections for Barometric Pressure<sup>A</sup>

Observed Temperature Corrected for Thermometer Inaccuracy	Correction per 1-mm Hg Difference in Pressure <sup>B</sup>	
	°C	°F
Under 100°C (212°F)	0.03	0.06
100°C (212°F) to 190°C (374°F)	0.04	0.07
Over 190°C (374°F)	0.04	0.08

<sup>A</sup> This table is an approximation based on the Sydney Young equation, as follows:

$$C_c = 0.000095 (760 \pm P) (273 \pm t_c)$$

where:

$C_c$  = correction to be added to the observed temperature,  $t_c$ , and  
 $P$  = actual barometric pressure in millimetres of mercury.

The corresponding equation for the correction of a Fahrenheit thermometer is as follows:

$$C_f = 0.000095 (760 \pm P) (460 \pm t_f) \text{ where:}$$

$C_f$  = correction to be added to the observed temperature,  $t_f$ .

<sup>B</sup> To be added in case barometric pressure is below 760 mm; to be subtracted in case barometric pressure is above 760 mm.

10.1.2 For unused concentrated samples boiling below 100°C (212°F), results should not differ from each other by more than 1.4°C (2.5°F), and for samples boiling above 100°C (212°F), results should not differ by more than 5.6°C (10°F).

10.2 *Bias*—Since there is no accepted reference material suitable for determining the bias for the procedure in this test method, bias has not been determined.

## **11. Keywords**

11.1 boiling point; engine coolant

*ASTM International takes no position respecting the validity of any patent rights asserted in connection with any item mentioned in this standard. Users of this standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, are entirely their own responsibility.*

*This standard is subject to revision at any time by the responsible technical committee and must be reviewed every five years and if not revised, either reapproved or withdrawn. Your comments are invited either for revision of this standard or for additional standards and should be addressed to ASTM International Headquarters. Your comments will receive careful consideration at a meeting of the responsible technical committee, which you may attend. If you feel that your comments have not received a fair hearing you should make your views known to the ASTM Committee on Standards, at the address shown below.*

*This standard is copyrighted by ASTM International, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA 19428-2959, United States. Individual reprints (single or multiple copies) of this standard may be obtained by contacting ASTM at the above address or at 610-832-9585 (phone), 610-832-9555 (fax), or service@astm.org (e-mail); or through the ASTM website (www.astm.org).*