1st edition, May 2007 Original

0

International Rail Ticket for Home Printing

This leaflet is to be published only in english





Leaflet to be classified in Volume:

Information Technology, Miscellaneous

Application:

With effect from 1 May 2007 All members of the International Union of Railways

Record of updates

1st edition, May 2007 First issue

The person responsible for this leaflet is named in the UIC Code



Contents

Sun	nmary		1
1 -	Mechanism		2
2 -	What is cov	vered by this standard?	4
3 -	Layout		5
	3.1 - Genera	al issues	5
	3.2 - The dif	ferent zones explained in detail	6
	3.2.1 -	The distributor zone (8)	8
	3.2.2 -	The adapted 918-2 layout ("the 918-2 zone" - (7))	8
	3.2.3 -	The reservation zone (6)	
	3.2.4 -	The certificates zones - the 2D certificate zone (2, 3, 4)	
	3.2.5 -	The page number zone (5)	
	3.2.6 -	The free distributor zone (1)	
		f tickets covered by this standard	
	3.4 - Adapte	ed UIC Leaflet 918-2 layout for the different types of ticket	15
	3.4.1 -	Open ticket	
	3.4.2 -	Open ticket + reservation	
	3.4.3 -	Open ticket + supplement	
	3.4.4 -	Open ticket + reservation + supplement	
	3.4.5 -	Global price ticket	17
4 -	The certific	ates	18
	4.1 - "Carrie	r Makes Certificate - CMC"	18
	4.2 - "Carrie	r keeps contract - CKC"	19
	4.3 - Digitall	y Signed Ticket (DST)	20
	4.4 - Combir	nations	20
	4.5 - Layout	of the certificate zones	21
	4.6 - Checki	ng of the certificates	21



5 -	Security services (CMC, CKC)	. 22
	5.1 - Mechanism	. 22
	5.2 - Certificate request string	. 22
	5.2.1 - Layout of the certificate request string	. 22
	5.2.2 - General fields	. 23
	5.2.3 - Passenger fields	. 24
	5.2.4 - Open tickets fields	
	5.2.5 - Reservation fields	
	5.3 - Certificate generation	. 27
	5.4 - Certificate transfer	. 27
	5.5 - Important remark about list of TCOs per train - multiple TCO's/segment	. 29
	5.6 - Cancellation message	. 30
	5.7 - Cancellation acknowledgement	. 31
6 -	Class diagrams of the different messages	32
	6.1 - Overview of the messages	. 32
	6.2 - Detailed specification of the classes	. 36
	6.2.1 - "Message" class	. 36
	6.2.2 - "Distributor" class	
	6.2.3 - "Supplement" class	
	6.2.4 - "Station" class	
	6.2.5 - "Segments" class	
	6.2.6 - "ReferenceID" class	
	6.2.7 - "TariffCharacteristics" class	
	6.2.8 - "Ticket" class	
	6.2.10 - "Passenger" class	
	6.2.11 - "Train" class	
	6.2.12 - "Error" class	
	6.2.13 - "FreeText" class	. 40
	6.2.14 - "IdentificationType" class	
	6.2.15 - "Date" class	41
	6.2.16 - "TCO" class	. 41
	6.2.17 - "SecurityString" class	. 41
	6.2.18 - "StringLayout" class	. 41
	6.2.19 - "CancellationReason" class	. 41
	6.2.20 - "Cancellation" class	. 41
	6.2.21 - "RecordNumber" class	42



	6.2.22 - "CertificateRequest" class	. 42
	6.3 - Use cases	. 43
	6.3.1 - Description	. 43
	6.3.2 - "Distributor_" actor	. 44
	6.3.3 - "TCO 1" actor	. 44
	6.3.4 - "CertificateCancellation" use case	. 44
	6.3.5 - "CancellationAcknowledgment" use case	
	6.3.6 - "ReceiveAcknowledgment" use case	. 44
7 -	Messaging process + exceptions in messaging (CMC, CKC)	. 45
	7.1 - Sequence in messaging	. 45
	7.2 - Messaging sequence diagrams	. 46
8 -	Specification of Digitally Signed Ticket (DST)	. 48
	8.1 - Mechanism	. 48
	8.1.1 - Introduction	. 48
	8.1.2 - Composition of the DST content	. 49
	8.1.3 - Control of the DST	
	8.1.4 - Compressing procedure	
	8.1.5 - Character encoding	. 51
	8.2 - Definition of the record structure	. 52
	8.3 - Definitions of the general record types	. 53
	8.4 - Definition of the record types for the ticket data according to the UIC standard	. 54
	8.4.1 - Extraction of RCT 2 zones	
	8.4.2 - Extraction of RCT2 ticket attributes	
	8.5 - Record types for ticket data in accordance with the standards of a specific TCO	. 58
	8.6 - Definition of the entire DST message structure	. 59
	8.7 - 2D Barcode symbol	
	8.8 - Key management	
	8.8.1 - Duration of validity of the signature key	
	8.8.2 - Test key pairs	
	8.8.3 - Exchange of signature keys (public keys) with partner companies	



9 - Option: list with cancelled certificates (CMC, CKC)	63
10 - Procedure for making home-printed tickets	65
11 - Checklist for a bilateral agreement between distributor & TCO	66
Appendix A - The accepted card types and abbreviation	71
Appendix B - Error codes and error messages	72
Appendix C - Layout of the certificate	73
Appendix D - Cancellation reasons	74
Appendix E - XML messages - layout (CMC, CKC)	75
List of abbreviations	76
Bibliography	78



Summary

This document describes the standard for home-printed tickets to be used in international carriage by train (a typical result of Internet sale). Home-printed railway tickets are already used for national transport. This standard describes how these tickets can be used in an international context.

Since some trains belong to one carrier, but the check on board is done by another carrier or more than one carrier, we will define TCO: "Ticket Controlling Organisation". This is any organisation who can control a passenger's ticket before, during or after a given journey (or part of it). In most cases this organisation will be a carrier or a subcontractor of a carrier.

N.B: A distributor can only sell international tickets in home-printing if he has a bilateral agreement with every TCO involved in the trip.

The agreement must precise the service levels (for example the responding time) and the types of tickets which can be sold (legal aspects!). Furthermore, all the information the TCO needs to produce a security-zone must be defined. To identify a passenger, one TCO uses the data on the credit card, another TCO uses the identity-card, a third company doesn't even ask for identification. Obviously, the distributor must request many different information from the client in order to send it to each TCO.

The agreement must also describe the conditions for using the ticket and the actions to be taken in case of an irregularity (e.g. fraud). All the options, described in this standard, must be described in the bilateral agreement.

The standard describes the mandatory layout of the home printed tickets and the messages that need to be exchanged between the TCOs and the distributors in order to create those tickets. The existing procedures (e.g. asking for availability of a train seat in a reservation, calculation of price of a ticket, ...) which are not specific to this kind of ticketing are part of other existing *UIC Leaflets i.e. 918-1 and 918-2*.

The standard is voluntarily very "open" in order to guarantee the railway undertakings a large choice of mechanisms to generate the certificates so that the TCOs can re-use their existing national standards and algorithms. Besides, the standard will not be accepted just like that in all the European trains. An E-ticket will only be made in dialogue with the TCO(s) in question. Only on the basis of a bilateral agreement, the TCO will generate a certificate for a distributor.

In this bilateral agreement, there will be a description of the kind of tickets which can be printed. It will be specified whether one ticket can be used for one or many reservation(s), what certificate mechanism to use, which elements are necessary to generate the certificates, which layout will be used to put the certificate on the ticket, if the distributor can place a picture in the background of the adapted 918-2 zone or not. A checklist is included in this standard to help railway undertakings to create a bilateral agreement.



1 - Mechanism

The terms "Passenger" and "Client" are used in this leaflet. They can be one and the same person but not necessarily. For example a passenger may take an international train trip using a ticket that was bought by his firm. In that case the firm is the client.

It is thus possible to distinguish between the client who buys the ticket and the passenger who is travelling. If several passengers are travelling together, one passenger must be defined as "head of the group". His or her personal data will be used to generate the certificate(s).

The distributor communicates with the client in order to produce a ticket. For this purpose, they exchange the same information as when the client buys his ticket at a selling point. The distributor can compose a ticket autonomously or through a connection with the different reservation systems necessary for creating the ticket.

This procedure is completely identical to the procedure of buying a normal ticket from a selling point and is therefore not a part of this standard.

Phase 1: The client books his ticket from the distributor via the Internet.

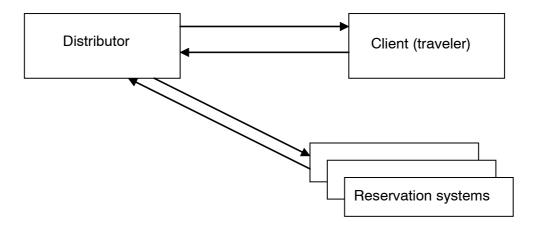


Fig. 1 - Booking



Phase 2: The distributor knows the itinerary and the travelling details and prepares the certificate request string.

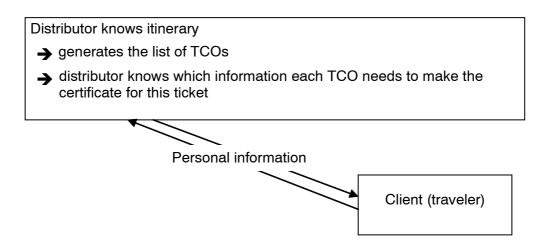


Fig. 2 - Preparing requests

Phase 3: The different TCOs concerned are being contacted to provide the certificate.

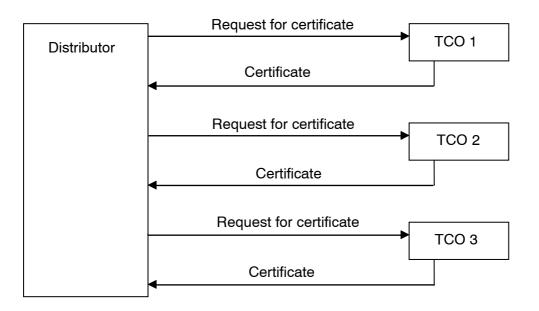


Fig. 3 - Communication Distributor - TCOs

Phase 4: The distributor creates the ticket with a standardised layout and sends it to the client.

The payment action is also part of the procedure, but depending on the distributor (and his relation with the client) this can be done earlier or later in the chain.

3 918-3



2 - What is covered by this standard?

The whole chain (buying a home printed ticket via the Internet) is shown in this diagram:

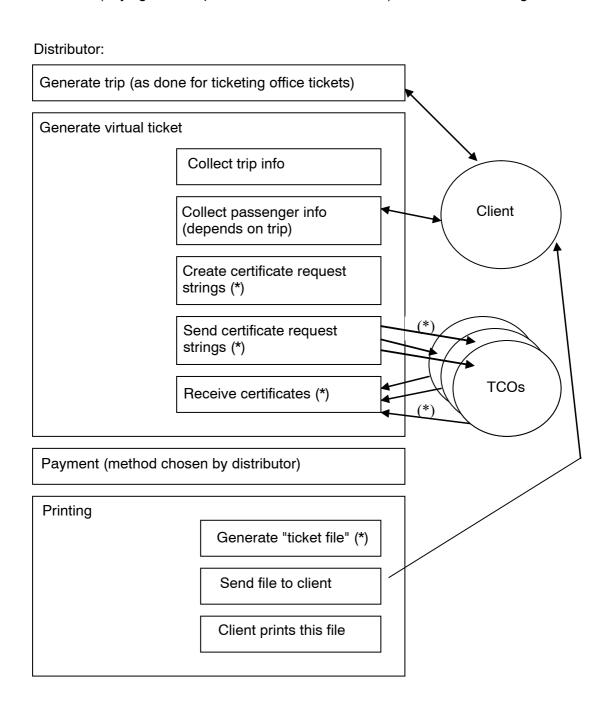


Fig. 4 - The home-printed ticketing scheme

The parts marked with an asterisk (*) are part of the standard.

The list of ticket types that are covered by this standard can be found in point 3.3 - page 15.



3 - Layout

3.1 - General issues

The ticket is divided in 3 parts:

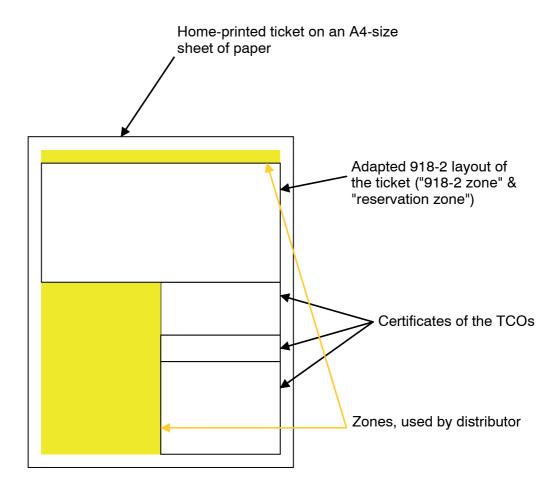


Fig. 5 - Home-printed ticket layout

In the yellow (shaded) zones the distributor can put any information he wishes, for example a reference to his file, a timetable, the conditions for using the ticket.

The top-zone is fixed and must be used to identify the distributor and the issuer. If the distributor is the issuer, only one representation will be enough. The layout is free (logo and/or text).

The 918-2 zone contains the information concerning the journey and the ticket as stated in *UIC Leaflet 918-2* (see Bibliography - page 78) which is already used by all the undertakings in order to control the trip and passenger info on the ticket. Possibly, a line will be added just beneath containing information about a reservation and/or a supplement. *UIC Leaflet 918-2* doesn't permit an open ticket + reservation on one ticket, the home printed version however must allow this combination.

The adapted 918-2 zone MUST ALWAYS contain the name of the/a passenger.



The lines "certificates of the TCOs" (see List of abbreviations - page 76) contain the RICS code of the TCO, of the boarding and destination stations (or the code(s) of the border(s)) plus the certificate itself. Each TCO must have its own code. Thalys, for example even if not yet a railway undertaking, cannot use the codes of SNCF or SNCB but needs its own code. The staff controlling on board of the Thalys trains or on the platform must act according to the security methods of Thalys, in spite of being, for example, SNCB-staff.

If the train leaves and arrives in the control zone of the TCO, the certificate zone indicates the actual boarding and destination stations. In the opposite case, when the train passes to another operator, the name of the station is replaced by the unique UIC code of the border.

Each company which may have to control the ticket will generate a certificate: an ASCII-string in answer to a question-string. The question-string must contain all the elements the TCO needs to create the security-part.

The designation of the contract of carriage (e.g. "TICKET", "TICKET+RESERVATION", ...) must be in the language of the interface of the website the client visited to generate this ticket. If this language is neither English, nor French nor German, the information must also appear in one of these languages.

The distributor may draw a line on the ticket to indicate that the client can travel with only the part above this line (no relevant information is found under this line). The client may then cut this ticket in two parts and use only the upper part.

3.2 - The different zones explained in detail

On the A4-printed ticket, the different zones are named as shown below and on the diagram in Fig 7 - page 7:



Fig. 6 - Legend of the different zones as shown in Figure 7



The colors are used to indicate where the different zones can be found on the physical ticket (see Fig. 6 - page 6). The size of the different zones is written in the description of the zone itself.

The size of the paper is defined as A4.

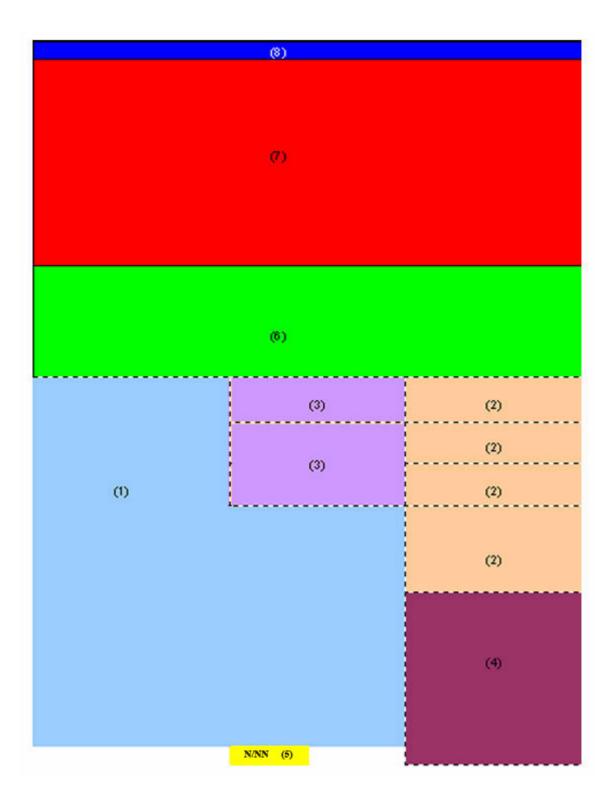


Fig. 7 - Zones of A4-printed ticket



3.2.1 - The distributor zone (8)

(size: W: min. 160 mm, H: 15 mm)

In this zone, the distributor MUST identify himself and if he wants to print a reference number for the ticket, it has to be done here. In this zone the coupon number (used for back-office purposes) is also printed.

Example:



B23 - 661539/23

OT 7198 9758 6756

3.2.2 - The adapted 918-2 layout ("the 918-2 zone" - (7))

(size: W: min. 160 mm, H: min. 70 mm)

This zone contains all the necessary elements in a layout, recognised by the train staff of the TCO(s).

Example:

		FAHRAUSWEIS	/ BILLET / BIGLIETTO	FISHER	GEORGE	
				01 Erwa	chsene	
Gültig/Val	id: 2004	31.12.1	970			
30	0	VON/DE/DA	→ NACH/A	30	(1)	KL.
30	~			00		CL.
24.10.	09.04	BERN	→ AMSTERDAM CS	24.10.	16.55	1
27.10.	07.05	AMSTERDAM CS	→ BERN	27.10.	16.11	*
VIA 1185-	OLTEN-BASE	L BAD.BF1180-KARLSRUH	HE-WORMS O FRANKFURT (M)-KÖLN-EMMERICH GR-1184	****		
ABT 1/2					CH	272.00
Bahncard	t			DIN		

Fig. 8 - The adapted 918-2 layout - example

NB: the distributor-logo on the top-left position of this zone may only be present if it is different from the "main" distributor logo as described in point 3.2.1.

A description of the elements can be found in *UIC Leaflet 918-2*, they are adapted in the following way:

- Row 4 (D): Note "Valid:" and year of departure of outward journey
- Row 16 to 18 (P to R): are dropped

8 918-3



2 different standards are possible:

- The basic layout: this is a layout, based on *UIC Leaflet 918-2* and recognisable by any TCO (same as the ATB-tickets but without the security-background).
- A particular picture based layout (picture serving as a security background): A distributor wishing absolutely to have a visually protected ticket, can decide to include in the bilateral agreement that the 918-2 zone is made out with this background. In that case, the UIC Leaflet 918-2 layout, created locally on the machines of the ticket-issuer, are printed on top of a picture with the same size. As this picture is locally added by the distributor, there is no need to send this information in a message from the TCO to the distributor.

Of course, the picture must allow the reading of all necessary elements in the 918-2 zone.

Example of the basic layout:

		FAHRAUSWEIS	/ BILLET / BIGLIETTO	FISHER (GEORGE	
				01 Erwa	chsene	
Gültig/Va	lid: 2004			31.12.19	970	
30	(1)	VON/DE/DA	→ NACH/A	30	(±)	KL.
30	~					CL.
24.10.	09.04	BERN	→ AMSTERDAM CS	24.10.	16.55	1
27.10.	07.05	AMSTERDAM CS	→ BERN	27.10.	16.11	*
VIA 1185-	OLTEN-BASE	L BAD.BF1180-KARLSRUHE	E-WORMS O FRANKFURT (M)-KÖLN-EMMERICH GR	3-1184 *****		
ABT 1/2					CH	272.00
Bahncar	d			DIN		

Fig. 9 - Adapted 918-2 zone - a basic ticket

3.2.3 - The reservation zone (6)

(size: W: min. 160 mm, H: variable, min. 0 mm)

If the ticket is with (a) reservation(s), then the distributor must add all the information, relative to this (the) reservation(s) in this zone.

Example:

PLATZRESERVIERUNGEN / RESERVATIONS

HINFAHRT/A	LLER/OUTWARD JOU	RNEY				ZUG/TH	RAIN	COACH	SEAT
24.10. 09	.04 BERN	->	BASEL SBB		09.59	*	*	*	*
24.10. 10	.12 BASEL SBB	->	FRANKFURT	(M)	13.06	ICE	76	001	26
24.10. 13	.17 FRANKFURT	(M) ->	AMSTERDAM	CS	16.55	ICE	126	800	4
RÜCKFAHRT/	RETOUR/RETURN JO	URNEY				ZUG/T	RAIN	COACH	SEAT
27.10. 07	.05 AMSTERDAM	CS ->	FRANKFURT	(M)	11.01	ICE	121	001	26
27.10. 12	.05 FRANKFURT	(M) ->	BERN		16.11	ICE	73	800	4

Fig. 10 - The reservation zone - example

9

918-3



Description of the elements

All elements are printed in the language of the distributor's website as well as in the second language of the contract of carriage (see point 3.1 - page 5).

Row 1: Note "Reservation" if reservation info is included

Note "Timetable" if only timetable info is included

Row 2: "Outward journey"

Row 3: Column 1: Departure date of first leg (format dd.mm)

Column 2: Departure time of first leg (format hh.mm)

Column 3: Departure station of first leg

Column 4: Right arrow

Column 5: Arrival station of first leg

Column 6: Arrival date of first leg (format dd.mm)

Column 7: Arrival time of first leg (format hh.mm)

Column 8: Train type and number

Column 9: Coach number

Column 10: Seat number(s)

Row 3 is repeated for any subsequent leg of the outward journey. For legs without reservation (only timetable information) columns 8 to 10 are invalidated by an asterisk ("*").

If the ticket includes a "return journey", a corresponding section (row 2 and 3 ff) is added with the indication "Return journey".

3.2.4 - The certificates zones - the 2D certificate zone (2, 3, 4)

(Size of the components:

(1) Alphanumeric W: 50 mm, H: 12,5 mm
 (2) 1D-barcode W: 50 mm, H: 25 mm
 (3) 2D-barcode W: 50 mm, H: 50 mm)

Basically, on a home-printed ticket, there are three different kinds of printed certificates. A certificate can be alphanumeric(1), a one-dimensional barcode(2) (= a standard barcode as used to tag goods in shops, can be replaced by a small 2D-barcode) or a two-dimensional barcode(3).

Depending on the kind of certificate, the size will be different. At the top of every certificate, there is the carrier code and a symbol, indicating if this certificate is for the outward leg, the return leg of the journey or for a round trip $(\rightarrow, \leftarrow \text{or} \leftarrow \rightarrow)$. The train staff looks for "his" certificate for the right leg and checks if the printed ticket-info is relevant.



The sizes of those certificates are:

Certificate	Height (mm)	Width (mm)
Alphanumeric	12,5	50
1D-barcode/small 2D-barcode	25	50
2D-barcode	50	50

For technical reasons linked to the 2D barcode-reader, the big 2D-barcode must always be printed in the lower-right part of the page (if a 2D barcode is included on the ticket).

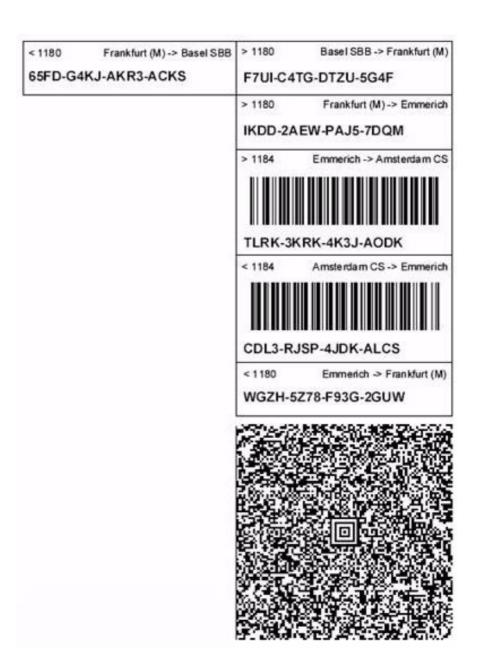


Fig. 11 - The certificates zone - example using different kinds of certificates



3.2.5 - The page number zone (5)

(size: W: min. 20 mm, H: 5 mm)

In the middle of the bottom of every page, the page number and the number of pages must be indicated.

The layout for this is XX/NN where XX is the page number and NN the number of pages.

3.2.6 - The free distributor zone (1)

(size depends on remaining space on ticket)

The distributor can add extra information (or publicity) for the client in this zone. The layout of this information, the size, the information itself may be freely chosen by the distributor.



Sample 1: Open ticket with reservations (scaled down to fit on this page)

(i)	⊿ 281	B CFF FFS					01	7198 975	o8 6/56
		FAHRAUSWEI	S / BILI	ET / BIGLIET	то			GEORGE achsene	
Gültig/Va	lid: 2004						31.12.1970		
30	(1)	VON/DE/DA		→ NACH/A			30	(1)	KL. CL.
24.10. 27.10.	09.04 07.05	BERN AMSTERDAM CS		→ AMSTERD → BERN	AM CS		24.10. 27.10.		1 *
VIA 1185-	-OLTEN-BAS	EL BAD.BF1180-KARLSR	UHE -WORMS	O FRANKFURT (M)-	KÖLN-EMMERIC	H GR-1184	1 ****		
ABT 1/2 Bahncar							DIN	СНІ	F 272.00
		NGEN / RESERVATION	NS / RIS	ERVAZIONI					
INFAHRT 4.10.	/ <i>ALLER</i> / 09.04	ANDATA BERN	-> FR	ANKFURT (M)	11.53	ZUG/1 ICE		AG PLATZ 001 26	
	13.00	FRANKFURT (M)		STERDAM CS	16.55	ICE		008 4	
		R/RITORNO						AG PLATZ	
7.10. 7.10.		AMSTERDAM CS FRANKFURT (M)	-> FR -> BE	ANKFURT (M) RN	11.01 16.11	I CE		001 26 008 4	
	ngen". Wei	n Fahrausweisen und lere Informationen finden S	Sie				TLRK-3KF : 1184 A CDL3-RJS	Frankfurt (M) W-PAJ5-7D(Emmerich > A RK-4K3J-AOI msterdam CS -> P-4JDK-ALC Frankfurt (M) 78-F93G-2G(msterdam CS DK Frankfurt (N
				1/1		September 1			

Fig. 12 - Example of an open ticket with reservations

13 918-3



Sample 2: Ticket with global price (scaled down to fit on this page)

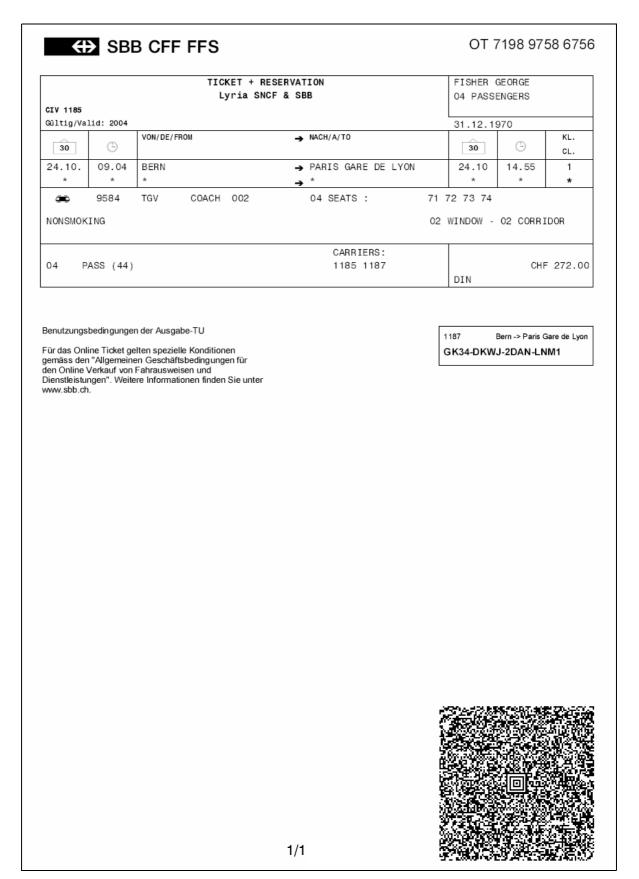


Fig. 13 - Example of a global-price ticket

14 918-3



3.3 - Type of tickets covered by this standard

In the first stage, we will define the layout of the following tickets:

- Open ticket
- Open ticket + reservation(s)
- Open ticket + supplement(s)
- Open ticket + reservation(s) + supplement(s)
- Global price tickets

Stand-alone supplements and stand-alone reservations will not be sold through home-printing.

3.4 - Adapted UIC Leaflet 918-2 layout for the different types of ticket

3.4.1 - Open ticket

The adapted 918-2 zone:

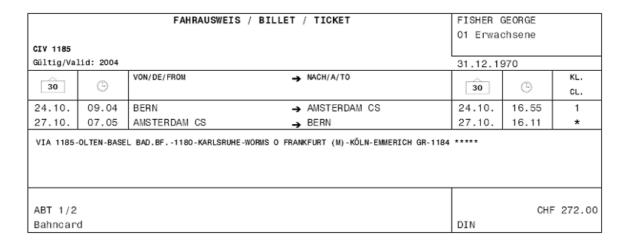


Fig. 14 - Adapted 918-2 zone of an open ticket



3.4.2 - Open ticket + reservation

The adapted 918-2 zone and the reservation zone:

		FAHRAUSWEIS /	BILLET	/ TICKET	FISHER (GEORGE	
					01 Erwa	chsene	
CIV 1185							
Gültig/Val	lid: 2004				31.12.19	970	
	VON/DE/FROM → NACH/A/TO						KL.
30	0				30	(3)	CL.
24.10.	09.04	BERN	→	AMSTERDAM CS	24.10.	16.55	1
27.10.	07.05	AMSTERDAM CS	→	BERN	27.10.	16.11	*
ABT 1/2						CHF	272.00

HINFAHR	T/ALLER/	OUTWARD JOURNEY					ZUG/T	RAIN	COACH	SEAT
24.10.	09.04	BERN	-> B	ASEL SBB		09.59	*	*	*	*
24.10.	10.12	BASEL SBB	-> FI	RANKFURT	(M)	13.06	ICE	76	001	26
24.10.	13.17	FRANKFURT (M)	-> A	MSTERDAM	CS	16.55	ICE	126	800	4
RÜCKFAH	RT/RETOU	IR/RETURN JOURNEY					ZUG/T	RAIN	COACH	SEAT
27.10.	07.05	AMSTERDAM CS	-> FI	RANKFURT	(M)	11.01	ICE	121	001	26
27.10.	12.05	FRANKFURT (M)	-> B	ERN		16.11	ICE	73	800	4

Fig. 15 - Adapted 918-2 zone and reservation zone of a ticket with reservation

3.4.3 - Open ticket + supplement

The adapted 918-2 zone:

		FAHRAUSWEI	S / BILLET / TICKET	FISHER	GEORGE	
		01 Erwachsene				
CIV 1185						
Gültig/Val	lid: 2004	31.12.1	970			
	A	VON/DE/FROM	→ NACH/A/TO			KL.
30	(1)			30	(3)	CL.
24.10.	09.04	BERN	→ AMSTERDAM CS	24.10.	16.55	1
27.10.	07.05	AMSTERDAM CS	→ BERN	27.10.	16.11	*
VIA 1185-	OLTEN-BASEI	L BAD.BF1180-KARLSRUH	E-WORMS O FRANKFURT (M)-KÖLN-EMMERICH GR-118	4 ****		
ZUSCHLÄGE	INBEGRIFF	EN / SUPPLEMENTS Y COMP	RIS / SUPPLEMENTS INCLUDED			
ABT 1/2					CHI	F 272.00
Bahncard	d			DIN		

Fig. 16 - Adapted 918-2 zone of a ticket with a supplement



3.4.4 - Open ticket + reservation + supplement

The adapted 918-2 zone and the reservation zone:

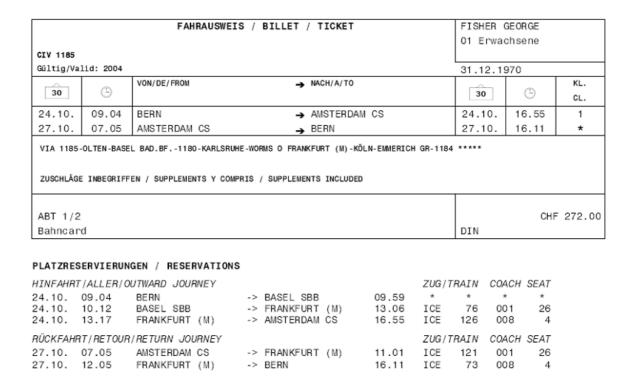


Fig. 17 - Adapted 918-2 layout and reservation zone of ticket + reservation + supplement

3.4.5 - Global price ticket



Fig. 18 - Adapted 918-2 layout of a global-price ticket

NB: These examples were created in a "basic layout" (see point 3.2.2 - page 8). If the bilateral agreement mentions that the layout should be picture-based, then this part of the ticket can be completely different.



4 - The certificates

The TCOs create the different certificates. The distributor sends the TCO the data needed to generate and deliver the certificate. This procedure is used in CMC and CKC (see List of abbreviations - page 76) environments (see points 4.1 and 4.2 - page 19). An exception is possible, when the distributor works autonomously, it is explained in the DST-description (see point 4.3 - page 20).

Three mechanisms are possible:

4.1 - "Carrier Makes Certificate - CMC"

The distributor sends client and ticket information to the TCO (or another company working on assignment for the TCO - this company may be the distributor itself working as a subcontractor for the TCO). The TCO calculates a certificate allowing him to check, when controlling the ticket, whether the content of the ticket has not been changed.

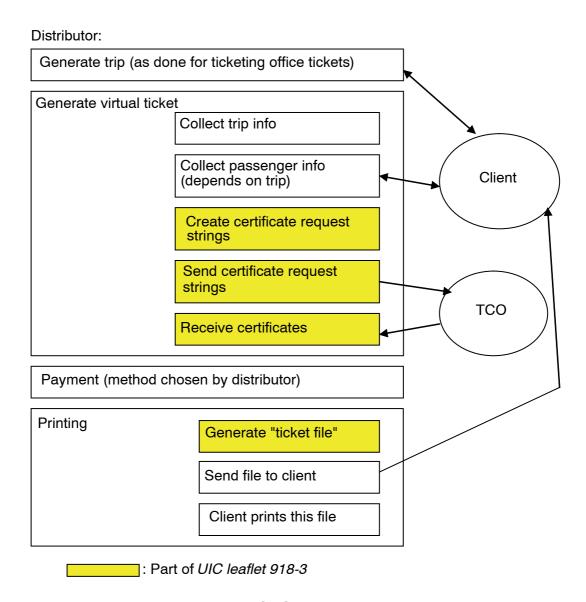


Fig. 19 - CMC standardisation



4.2 - "Carrier keeps contract - CKC"

The distributor sends client and ticket information to the TCO (or another company working in assignment for the TCO). The TCO creates a complete travel file and saves it on his server(s). The distributor receives the reference number of the file and uses it as a certificate. The TCO can control the client by looking on his server for the information that goes with the reference number. The control consists in verifying whether this information matches with the client and his journey. For the distributor this system is transparent and identical to the CMC procedure.

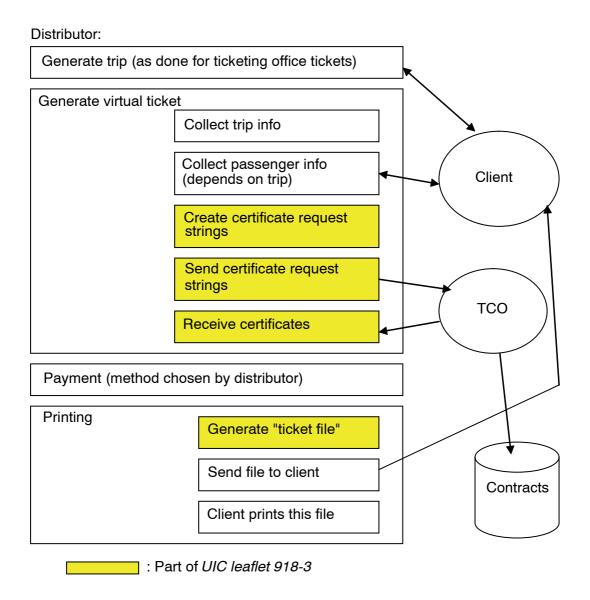


Fig. 20 - CKC standardisation

19 918-3



4.3 - Digitally Signed Ticket (DST)

As in point 4.1 - page 18, but the distributor and the TCO use an asymmetrical algorithm to calculate the certificate, so that the distributor can create a certificate autonomously. *UIC Leaflet 918-3* - point 8 - page 48 describes the algorithm completely, apart from the key pairs that must be defined for each agreement. This method has the advantage that the algorithm works on every system (the efficiency has been studied a priori) and that an algorithm has to be programmed only once and will work with any TCO. In case the bilateral agreement enables this system (DST) (see List of abbreviations - page 76), the TCO and the distributor only have to describe the key pairs and the mechanism and frequency for exchanging them.

The mechanism of exchanging the keys is also part of the bilateral agreement.

As the generation of the certificates is done locally, the dataflow is as follows:

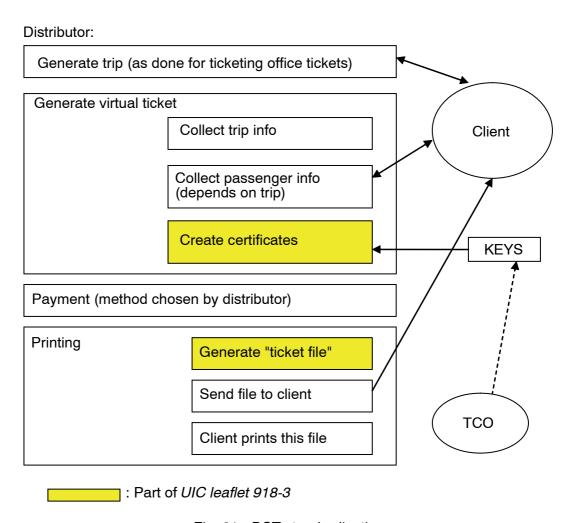


Fig. 21 - DST standardisation

4.4 - Combinations

Of course, combinations of two or three of the above described mechanisms are possible. The distributor has to know (by the bilateral agreements) which mechanism is applied with each TCO.



4.5 - Layout of the certificate zones

As mentioned, three different kinds of certificates are possible:

- an alphanumeric certificate,
- a one-dimensional barcode.
- a 2D-barcode.

The 2D-barcode will be printed on the bottom-right zone of the ticket and will not be preceded by any other text.

The 1D-barcode or alphanumeric kind of certificates will be printed in two lines:

where:

d(2) : arrow, indicating direction (>, < or <>)

a(4) : TCO-code (carrier code)

b(17) : boarding station name for this segment (alphanumeric *UIC Leaflet 920-2*)

c(17) : destination station name for this segment (alphanumeric *UIC Leaflet 920-2*)

e(20) : certificate (alphanumeric or barcode)

in case of a barcode, the info of the barcode is printed just below in alphanumeric layout too (to be used in case of a problem while reading the barcode).

4.6 - Checking of the certificates

The train staff of each TCO will check the certificate specific to that TCO. The on-board personnel will "decrypt" the information found in the zone as it was created by the TCO and recognise the zone using the carrier code number (zone "a" in point 4.5).



5 - Security services (CMC, CKC)

5.1 - Mechanism

The first and second methods (CMC, CKC) require a transfer of information from the distributor to the TCO to ensure that the required data are available for the issuing of the certificate. This action must be repeated for each TCO.

There are two types of information:

- references of the passenger(s), and
- references of the trip.

Each TCO has to send a certificate as an answer to this certificate request string. The certificate contains a maximum of 200 characters and must be presented in the form of a text (and optionally as a bar-code, or on a smartcard).

All the data that may be communicated between the distributor and the TCO are listed in point 5.2.2 - page 23. Obviously not all these data must be used to generate the certificate. The bilateral agreement will specify the data the TCO needs to issue the certificates.

5.2 - Certificate request string

5.2.1 - Layout of the certificate request string

Schema A is available on the UIC Website: http://www.uic.asso.fr / Activities / Passenger / Distribution & systems / Passengers Messages Management Group (GMP) / Leaflets / 918-3 / Schema A.

The following definition applies for all types of tickets - open tickets and train connected tickets, even a combination is possible.

The different fields that should be used to create CR-messages are:

- General fields (G)
- Passenger fields (P)
- Open train fields (O)
- Reservation fields (R)

A message must always contain exactly one G, at least one P and may contain several O and/or R.

For example:

- one passenger, making one-way trip with a global-price reservation mandatory train:
 G + P + R
- group with 3 passengers making a journey consisting of one open section and two sections where reservation is mandatory:

$$G + (P + O + R + R) + (P + O + R + R) + (P + O + R + R).$$

22 918-3



The first group (P + O + R + R) contains the trip-info (including the exact reservation info and the reduction info for this client on these trains) for the first member of the group.

The second and the third series of data hold the info for the second and third traveller.

5.2.2 - General fields

Number in sequence	Element	Number of characters	Mandatory	Code	Num/ Alpha	Comments
1	Message type	2	X	X	Α	"CR" (certificate request)
2	Distributor-ID part of Certificate Request ID (distributor) (distributor reference part 1/2	4	X	X	Z	Code that refers to the distributor (as in <i>UIC</i> Leaflet 920-1)
3	Reference part of Certificate Request ID (distributor) (distributor reference part 2/2)	16	X		Α	e.g. Order number / Other reference / Online Code
4	Name of client	20			Α	First 20 characters of name
5	First name of client	20			Α	First 20 characters of first name
6	Client identification number	20			Α	ID, credit card
7	Client identification type	4		Х	A	Type of card. A list of the different cards is found in Appendix A - page 71
8	Number of travellers	2	X		N	
9	Birth date	8			N	DDMMYYYY
10	Class	1	Х	Х	Α	following UIC Leaflet 918-1 element 24
11	Single or return journey	1	Х	Х	А	"0": single journey "1": return journey

NB:

- Elements 2 and 3:

This is the reference number of the distributor. The answer of the TCO will refer to this number. This element is not only for runtime, but also for after sale operations on the database (clearing...).

- Element 4 and 5:

The client is the person whose identity can be used to generate the certificate. For example, if credit card information is used in the certificate generation algorithm, it must be the data of this person.



- Element 6:
 - Several systems for calculating the certificates are linked to (credit) card numbers. This is the card the traveller will use during his voyage to identify himself and not necessarily the card he used to pay for his trip (cf. Creditcard).
- Element 10: According to GIV and *UIC Leaflet 918-1*, the class may also be indicated using a letter.

5.2.3 - Passenger fields

The following 3 elements describe the passengers.

For each passenger the elements are repeated.

Number in sequence	Element	Number of characters	Mandatory	Code	Num/ Alpha	Comments
1	Sequence number of the traveller	2	Х		N	
2	Type of passenger	5	Х	Х	N	Tariff codes according to UIC Leaflet 301, Appendix C
3	Reduction for this passenger	6	Х	Х	А	According to UIC Leaflet 301



5.2.4 - Open tickets fields

The following definition is added to the passenger part (see point 5.2.3 - page 24) for open tickets. In case of a round trip ticket it appears twice:

- first instance for the outbound journey, and
- second instance for the return part of the trip.

ID Number in sentence	Element	Number of characters	Mandatory	Code	Num/ Alpha	Comments			
	The following elements describe the legs of the route. For each leg the elements are repeated.								
1	Sequence number of leg	2	Х		N				
2a	Boarding station	7	Х	Х	N	According to UIC Leaflet 918-1, element 22A			
2b	Boarding station	AAA	Х	Х	Α	H2H-code			
3a	Destination station	7	Х	Х	N	According to UIC Leaflet 918-1, element 22B			
3b	Destination station	AAA	Х	Х	А	H2H-code			
4	Supplement	1	Х	Х	А	"0": not included "1": included			
5a	Tariff	9		Х	N	According to UIC Leaflet 918-1, element 42			
5b	Tariff code	BBB		Х	Α	H2H-code			
6	Reduction %	2			N				
7	Date	8	Х		Α	DDMMYYYY			
8	Last day of validity	8	Х		Α	DDMMYYYY			

NB: 2a/2b, 3a/3b, 5a/5b can be chosen - must be described in the bilateral agreement AAA/BBB will be defined in the bilateral agreement (if H2H-codes are used).



5.2.5 - Reservation fields

The following definition is added to the passenger part (see point 5.2.3 - page 24) for open tickets with reservation or for global-price tickets. In case of a round trip ticket it appears twice:

- first instance for the outbound, and
- second instance for the return part of the trip.

ID Number in sentence	Element	Number of characters	Mandatory	Code	Num/ Alpha	Comments			
	The following elements describe the trains used. For each train the elements are repeated.								
1	Sequence number of train	2	X		N				
2	Former reference number	10			Α	TCO, i.e. PNR			
3	Train number	5	Х	Х	Α	According to UIC Leaflet 918-1, element 20A			
4	Coach number	3			Α	According to UIC Leaflet 918-1, element 27			
5	Seat number	3			Α	According to UIC Leaflet 918-1, element 28			
6a	Boarding station	7	Х	Х	N	According to UIC Leaflet 918-1, element 22A			
6b	Boarding station	AAA	Х	Х	Α	H2H-code			
7a	Destination station	7	X	Х	N	According to UIC Leaflet 918-1, element 22B			
7b	Destination station	AAA	Х	Х	Α	H2H-code			
8	Supplement	1	X	Х	Α	"0": not included "1": included			
9a	Tariff	9		Х	Α	According to UIC Leaflet 918-1, element 42			
9b	Tariff code	BBB		Х	Α	H2H-code			
10	Reduction %	2			Α				
11	Date	8	Х		Α	DDMMYYYY			
12	Last validity date	8	Х		Α	DDMMYYYY			

NB: - 6a/6b, 7a/7b, 9a/9b can be chosen - must be described in the bilateral agreement

- AAA/BBB will be defined in the bilateral agreement (if H2H-codes are used)
- "Former reference number":
 When the file is linked to a former demand (i.e. the reservation in the inventory system of the TCO or one of his partners) the file number of the request must be added.



5.3 - Certificate generation

This information, namely the completed fields (as described in the bilateral agreement), allows the TCO to generate his certificate. The TCO is free to use his own method to generate this certificate. He generates it and controls it afterwards in the train. The formula he uses to make a character-based certificate is his own and must not be shared. The max. size of the character string is defined in the layout of the CT-message in point 5.4 - page 27. He can decide how this character-based certificate should be presented on the home-printed ticket (alphanumeric, 1D-barcode (+ what standard to use), 2D-barcode or other presentation).

5.4 - Certificate transfer

Schema B is available on the UIC Website: http://www.uic.asso.fr/ Activities / Passenger / Distribution & systems / Passengers Messages Management Group (GMP) / Leaflets / 918-3 / Schema B.

In return the TCO sends the following data.

Number in sequence	Element	Number of characters	Mandatory	Code	Num/ Alpha	Comments
1	Message type	2	Х	Х	А	ID is "CT" (certificate transfer)
2	Certificate Request ID (distributor)	20	Х		N	2 parts: Distributor-ID part (4) and reference part (16) - see general fields description in point 5.2.2 - page 23 - field 3
3	TCO transaction ID	20	Х		N	2 parts: TCO-ID part (4) and reference part (16) - as in general fields description in point 5.2.2 - page 23
4	Error code	2	Х	Х	N	See Appendix B - page 72
The followin	g 8 elements are repe	ated for each	train (i= index	of text fie	eld).	
5 + 8i	Sequence number of the train	2	Х		N	
6 + 8i	Boarding station segment	7	Х		N	According to UIC Leaflet 918-1, element 22A
7 + 8i	Destination station segment	7	Х		N	According to UIC Leaflet 918-1, element 22B
8 + 8i	TCO code	4	Х	Х	А	According to UIC Leaflet 918-1, element 78



Number in sequence	Element	Number of characters	Mandatory	Code	Num/ Alpha	Comments
9 + 8i	Client identification number	20			A	e.g. some digits of number of credit card or ID-card or loyalty-card used to verify the certificate. The cardholder must be the traveller, responsible for the group (see point 1 - page 2) (the card is not necessarily the card, used to buy the ticket)
10 + 8i	Client identification type	4		X	A	Type of card used to verify the certificate. A list of the different cards is found in Appendix A - page 71 see also remark above about "traveller, responsible of the group"
11 + 8i	The way the string should be presented	6	Х	Х	А	See Appendix C - page 73
12 + 8i	The actual security-string (the "certificate")	200	Х		A	Size depends on presentation

NB: If "Error Code" is not "00", then subsequent elements (5 etc.) are replaced by the following:

5	Error message	100		Description of the actual error (for
				development)




5.5 - Important remark about list of TCOs per train - multiple TCO's/segment

It is possible that the TCO is different from the carrier. For example, some German ICE-trains going to the Netherlands have Dutch control staff on board. This means that the NS has to be added on the list of the TCOs in case of a home-printed ticket for this train so that they can generate a certificate that will be printed on the ticket.

For the Distributor it is quite impossible to know all the TCOs per train for every possible carrier. The carrier itself knows all the TCOs that can be working on his specific trains.

The distributor will ask the carrier (logically the first TCO involved) to generate a certificate and if the carrier knows that one or more supplementary TCO(s) will have to generate also a certificate, than the carrier itself will send a demand for certificate to the other TCO(s). They will answer the carrier (the first TCO) by sending their certificates for this trip. The carrier will send to the distributor not only the certificate he generated, but also the certificates he received from the other TCO(s).

The demand of the carrier addressed at other TCOs is following the same mechanism as the demand from a distributor to a TCO. The carrier sends a Certificate Request message to a TCO and the TCO sends a Certificate Transfer message as an answer to the carrier.

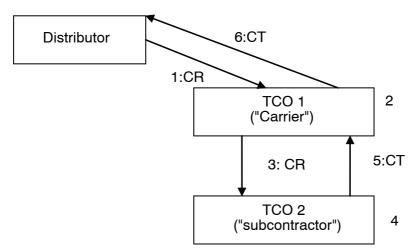

- Step 1: Distributor contacts the carrier ("TCO1")
- Step 2: TCO1 creates a certificate and contacts, based on the train list, TCO2
- Step 3: TCO1 sends to TCO2 a Certificate Request
- Step 4: TCO2 creates his certificate
- Step 5: TCO2 sends his certificate to TCO1
- Step 6: TCO1 sends his certificate and the certificate he received from TCO2 in one CT-message to the distributor who sent the initial CR.

Fig. 22 - More than one TCO for one segment



5.6 - Cancellation message

Schema C is available on the UIC Website: http://www.uic.asso.fr/ Activities / Passenger / Distribution & systems / Passengers Messages Management Group (GMP) / Leaflets / 918-3 / Schema C.

A cancellation message can be generated by the distributor in four different cases:

- 1. the CR message did not result in a CT (see List of abbreviations page 76) message in time;
- 2. the CR message was resulting in a CT but another TCO did not answer appropriately;
- 3. the CR message resulted in a CT message but the client did not go till the end (payment, printing, ...) so the generated certficate will not be used and must be cancelled;
- 4. in case of a closed system, the printed and payed ticked is exchanged or cancelled. The cancellation message is to inform the TCO that this ticked is no longer valid.

Number in sequence	Element	Number of characters	Mandatory	Code	Num/ Alpha	Comments
1	Message type	2	X	Х	Α	ID is "CM" (cancellation message
2	Reference ID of cancellation	20	Х		N	2 parts: Distributor-ID part (4) and reference part (16) - see general fields description in point 5.2.2 - page 23
3	Record number	5	Х		N	Sequence number
4	Certificate request ID (distributor)	20	Х		N	2 parts: Distributor-ID part (4) and reference part (16) -see remark about record 2
5	TCO transaction ID	20			N	2 parts: TCO-ID part (4) and reference part (16) - see general fields description in point 5.2 - page 22 ^a
6	Cancellation reason	20		Х	А	Reason of cancellation - see list in Appendix D - page 74

a. only if the distributor received an answer from the TCO.



5.7 - Cancellation acknowledgement

Schema D is available on the UIC Website: http://www.uic.asso.fr/ Activities / Passenger / Distribution & systems / Passengers Messages Management Group (GMP) / Leaflets / 918-3 / Schema D.

Number in sequence	Element	Number of characters	Mandatory	Code	Num/ Alpha	Comments
1	Message type	2	Х	Х	Α	ID is "CA" (cancellation acknowledgement)
2	Cancellation reference ID (distributor)	20	X		N	2 parts: Distributor-ID part (4) and reference part (16) - see general fields in point 5.2 - page 22
3	Ack error	200	Х		А	No error: Blank Error: Message (e.g. client trying to cancel twice)



6 - Class diagrams of the different messages

6.1 - Overview of the messages

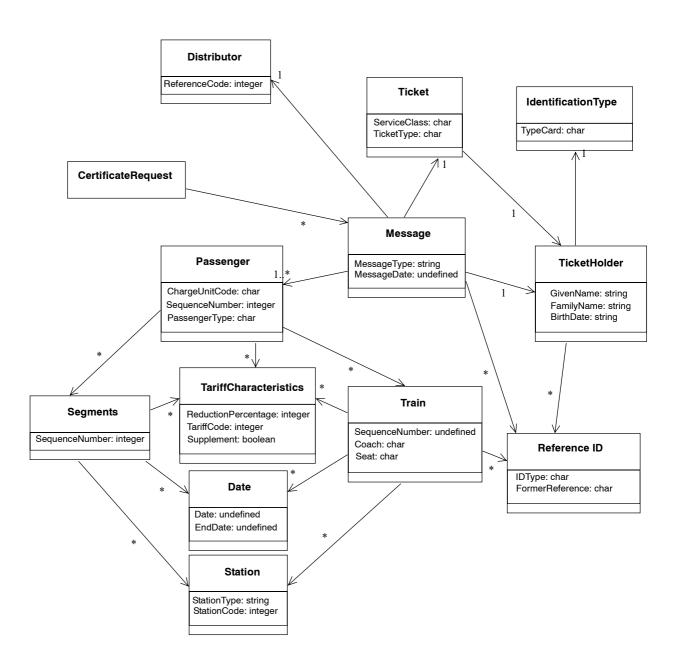


Fig. 23 - Class diagram: Certificate Request_Message

32 918-3



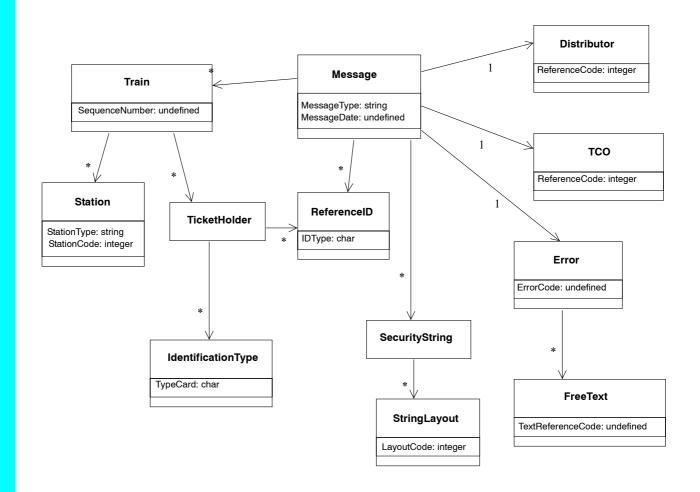


Fig. 24 - Class diagram: Certificate Transfer_Message



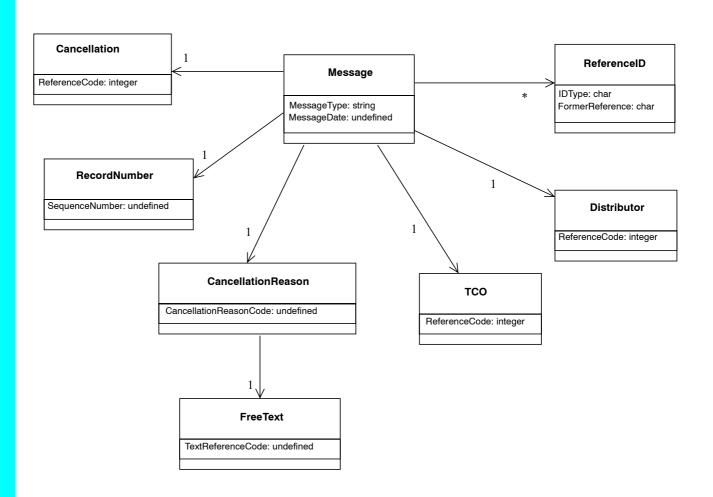


Fig. 25 - Class diagram: Cancellation_Message



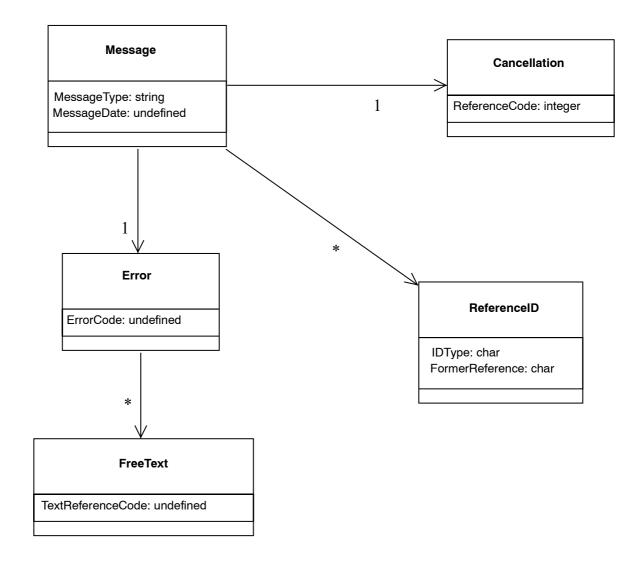


Fig. 26 - Class diagram: Cancellation Acknowledgement_Message



6.2 - Detailed specification of the classes

6.2.1 - "Message" class

It contains the following associations:

- Distributor,
- ReferenceID,
- Segments,
- Train,
- Error,
- Passenger,
- TicketHolder,
- Ticket,
- Train,
- TCO,
- SecurityString,
- CancellationReason,
- ReferenceID,
- Cancellation,
- RecordNumber.

- MessageType,
- MessageDate.



6.2.2 - "Distributor" class

An undertaking providing to an issuer the legal and technical capacity to sell rail products to a customer, or providing directly to the customer the legal and technical capacity to buy rail products.

It contains the following attributes:

- ReferenceCode: Distributor identification; Limited to 4 positions.

6.2.3 - "Supplement" class

Yes/No condition if supplement applies to journey.

It contains the following attributes:

- SupplementApplied.

6.2.4 - "Station" class

Station identification

It contains the following attributes:

- StationType: Boarding Station, Destination Station,
- StationCode.

6.2.5 - "Segments" class

Description of segments of journey.

It contains the following associations:

- Supplement,
- Station,
- TariffCharacteristics,
- Ticket,
- Station,
- TariffCharacteristics,
- Date

It contains the following attributes:

- SequenceNumber



6.2.6 - "ReferenceID" class

If used to indicate a Certificate Request ID, it refers to the reference number of the distributor; The answer of the TCO will refer to this number. In order to ensure the uniqueness of the number, it is associated with the 4-digit code of the distributor. This request ID allows the distributor to make a distinction when the answers of the different TCOs arrive at the different moments. This element is not only runtime, but also for after sale operations on the database.

May also be used to indicate the identification reference of a ticket holder (Credit Card, Bahn Card, etc.).

It contains the following attributes:

- IDType: describes the Type of Identification reference (i.e. Credit Card, Bahn Card, etc.). Will use enumerated values
- FormerReference.

6.2.7 - "TariffCharacteristics" class

Provides details on the tariff.

It contains the following attributes:

- ReductionPercentage,
- TarifCode,
- Supplement.

6.2.8 - "Ticket" class

Provides details related to Ticket.

It contains the following associations:

TicketHolder.

- TicketType: one way = 1; round trip = 2,
- EndDate: used only for Open Ticket. Expressed as YYMMDD,
- ServiceClass: Class of service based on *UIC Leaflet 920-16* (see Bibliography page 78),
- Date: Expressed as YYMMDD.



6.2.9 - "TicketHolder" class

Client name and identification.

It contains the following associations:

- ReferenceID,
- Passenger,
- IdentificationType,
- ReferenceID,
- IdentificationType.

It contains the following attributes:

- GivenName: First 20 Characters of the Client's First Name. Harmonised with UNTDED and ISO Directory,
- FamilyName: Client's Family Name limited to 20 Characters. Harmonised with UNTDED and ISO directories.
- BirthDate.

6.2.10 - "Passenger" class

Details of passengers included on a ticket.

It contains the following associations:

- TariffCharacteristics,
- Train,
- Segments.

- ChargeUnitCode: Type of Passenger (Tag 5261 as defined in UIC Leaflet 920-16) limited to 2 positions. Based on UN/EDIFACT Directory. Values are 10 = Adult; 11 = Child; 12 = Employee;
- SequenceNumber: Sequence number for Passenger;
- PassengerType.



6.2.11 - "Train" class

It contains the following associations:

- Supplement,
- Station,
- Ticket,
- ReferenceID,
- TariffCharacteristics,
- ReferenceID,
- Date,
- Station,
- TicketHolder.

It contains the following attributes:

- SequenceNumber,
- Coach,
- Seat.

6.2.12 - "Error" class

It contains the following associations:

- FreeText.

It contains the following attributes:

- ErrorCode: 00 = No Error; 01 = Train not Possible; 02 = Client Blacklisted; 03 = System Down; 04 = Insufficient Parameters; 05 = Incompatible Parameters

6.2.13 - "FreeText" class

- TextReferenceCode,
- Reservation: 0 = No; 1 = Yes.



6.2.14 - "IdentificationType" class

It contains the following attributes:

- TypeCard.

6.2.15 - "Date" class

It contains the following attributes:

- Date,
- EndDate.

6.2.16 - "TCO" class

It contains the following attributes:

- ReferenceCode.

6.2.17 - "SecurityString" class

It contains the following associations:

- StringLayout.

6.2.18 - "StringLayout" class

It contains the following attributes:

- LayoutCode.

6.2.19 - "CancellationReason" class

It contains the following associations:

FreeText.

It contains the following attributes:

- CancellationReasonCode.

6.2.20 - "Cancellation" class

It contains the following attributes:

- ReferenceCode.



6.2.21 - "RecordNumber" class

It contains the following attributes:

- SequenceNumber.

6.2.22 - "CertificateRequest" class

It contains the following associations:

- Message.



6.3 - Use cases

6.3.1 - Description




Fig. 27 - Use case diagram: (Analysis) - DistributorSendCertificateCancellation




Fig. 28 - Use case diagram: (Analysis) - TCO SendCancelationAcknowledgment

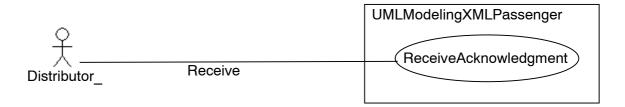


Fig. 29 - Use case diagram: (Analysis) - DistributorReceiveAcknowledgment

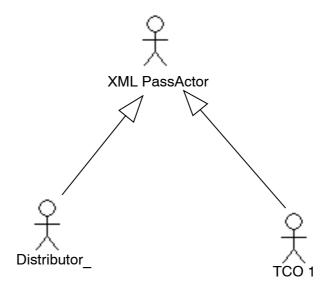


Fig. 30 - Use case diagram: (Analysis) - Actors

43 918-3



The actors concerned are:

- distributor_,
- TCO 1,
- XML PassActor.

The defined use cases are:

- CertificateCancelation,
- CancelationAcknowledgment,
- ReceiveAcknowledgment.

6.3.2 - "Distributor_" actor

It specializes the actor XML_PassActor.

It cooperates with the following use cases:

- CertificateCancelation,
- ReceiveAcknowledgment.

6.3.3 - "TCO 1" actor

It specifies the actor XML PassActor.

It cooperates with the following use cases:

- CancelationAcknowledgment.

6.3.4 - "CertificateCancellation" use case

The cooperating actors are:

- Distributor .

6.3.5 - "CancellationAcknowledgment" use case

The cooperating actors are:

- TCO 1.

6.3.6 - "ReceiveAcknowledgment" use case

The cooperating actors are:

- Distributor .



7 - Messaging process + exceptions in messaging (CMC, CKC)

7.1 - Sequence in messaging

Possible answers that every TCO gives to the distributor after receiving the certificate request string-message:

- no answer (time-out),
- error code = 00 + certificate (string),
- error code <> 00 + error message (see Appendix B page 72).

The TCO has only one chance to send the certificates or the error messages. Within x seconds after receiving the request to generate the certificate, the TCO has to return an answer (the time limit will be contractually fixed in the Service Level Agreement between the distributor and the TCO). The distributor will cancel the sale if he didn't receive a message within the fixed time limit. If a sale is cancelled, all certificates of the different TCO's, linked to this ticket, will be cancelled.

A cancellation message (sent from a distributor to a TCO) always results in a cancellation acknowledgement (going from the TCO to the distributor who sent the cancellation message).

If the distributor did not receive the cancellation acknowledge message in time, he will retry max. 2 times immediately. If no cancellation acknowledge comes in, even after 2 retries, the procedure of sending a cancellation message will start again every two hours until a cancellation acknowledge is received. If no answer comes in after 3 days, the cancellation request messages will no longer be sent.



7.2 - Messaging sequence diagrams

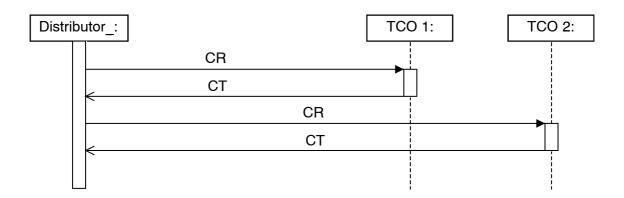


Fig. 31 - The normal sequence - 2 TCOs

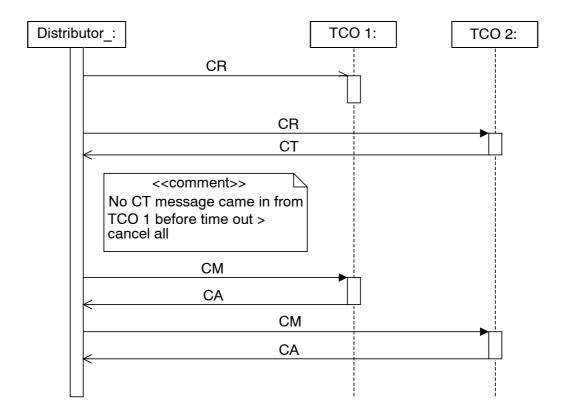


Fig. 32 - Special case 1: no answer from TCO1



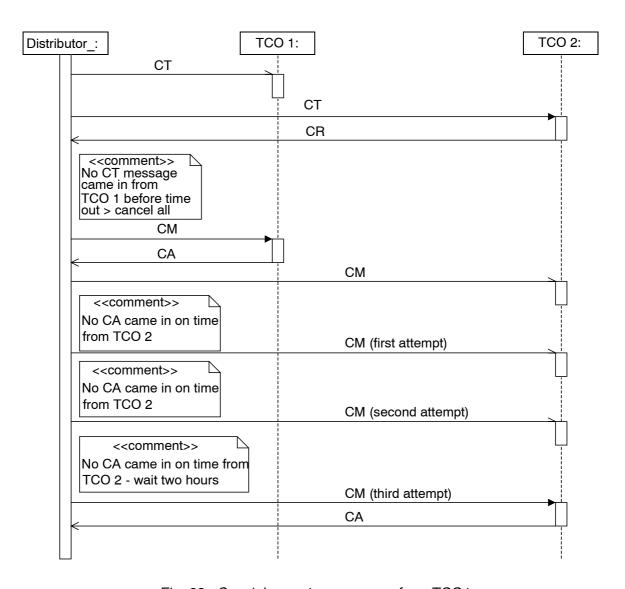


Fig. 33 - Special case 1 - no answer from TCO1



8 - Specification of Digitally Signed Ticket (DST)

8.1 - Mechanism

8.1.1 - Introduction

Instead of generating the certificates himself, the TCO can offer the distributor the possibility to do it locally by means of public key cryptography. This will result in a certificate that is larger than the certificate obtained by using symmetric key-pairs. An alphanumeric presentation will therefore not be useful and a common one-dimensional barcode can no longer be used. A possible solution to integrate these data in the paper ticket is a two-dimensional barcode.

The standard will describe the mechanism the different companies will have to follow if they choose this option. It speaks for itself that this choice will be the result of a bilateral agreement.



8.1.2 - Composition of the DST content

The content of the DST in international passenger traffic is composed as follows:

- 1. Message header with message ID and digital signature
- 2. Main record
- 3. Record with RCT2 ticket layout
- 4. Record(s) based on specific TCO standards (optional).

The definition of these record types is appointed in the following chapters of this document.

The sequence of the records is seized by means of a compressing technique and then displayed on the support medium (2D Barcode, Smartcard, etc.).

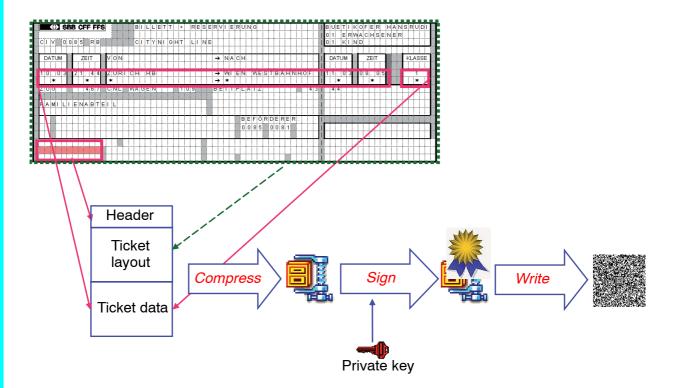


Fig. 34 - Survey on generating the DST



8.1.3 - Control of the DST

The control process by means of an apparatus contains the following steps:

- Reading the content of the DST (2D Barcode, Smartcard, etc.)
- 2. Decompressing the content
- 3. Checking the signature by means of a public key. If the result is negative, the train manager receives a corresponding notice
- 4. Output of the content of the ticket on the display (in the layout of the ticket printout)
- 5. Automatic check of some essential ticket attributes (trip date etc.)
- 6. Receiving the outcome of the control of the train manager.

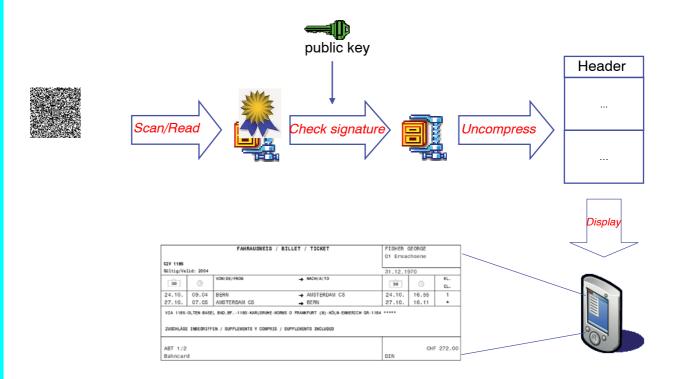


Fig. 35 - Overview of the online ticket control

NB: If the validation of the signature takes too long (conform calculating power of the apparatus), the steps "signature check" and "Output of the content of the ticket on the display" can be switched. The signature check can take place while the train manager is controlling the ticket visually. In that case, an invalid signature is notified by a certain temporary delay. Since this is rather an exception, it's not a constraint for the normal control process.

50 918-3



8.1.4 - Compressing procedure

For the compressing procedure the algorithm Deflate will be applied. The specification of Deflate can be found in *RFC1951* (see Bibliography - page 78).

Comparing tests have shown that Deflate provides the best compression rate (for the content of the DST) among the procedures that were compared.

8.1.5 - Character encoding

Textfields with fixed length may not be encoded, e.g. special characters are not permitted.

Textfields with a variable length may contain special characters. The strings must be encoded using UTF-8 transformation. The specification of UTF-8 can be found in *RFC3629* (see Bibliography - page 78).

Special characters will increase the length of the encoded string, since they are encoded using several octets.

NB: the value of the according length field must be determined after encoding the text, in order to allow decoding the entire text again when parsing the content.



8.2 - Definition of the record structure

The different categories of content require a flexible structure. The structure must answer the following demands:

- General record types, that are handed out and interpreted by all operators and distributors;
- For specific ticket data, operators and distributors can define their own record types. This way attributes that are not defined in the UIC standards can be used as ticket message content.

Each record type is composed according to the following pattern:

Number in sequence	Element	Number of characters	Mandatory	Code	Comments
1	Record ID	6A	X	X	Composition: - "Uxxxxx" for record types, standard in UIC. "xxxxx" is variable and determines the type - "4 characters RICS Code" + "xx" for record types defined by separate TCOs. "xx" is variable and can be filled in freely by the TCO for each type (2 characters)
2	Record version	2N	Х		Allows different versions of one record type (having the same record ID)
3	Record length	4N	Х		Number of characters starting from the record beginning (from the first character of the element "record ID")
		Α			The actual fields of the records



8.3 - Definitions of the general record types

Main record (U_HEAD)

This record is mandatory for DSTs in accordance with *UIC Leaflet 918-1*.

The main record contains information in common with all the transport documents (regardless of the ticket layout standard, a domestic or international ticket).

Number in sequence	Element	Number of characters	Mandatory	Code	Comments
1	Record ID	6A	X	Х	ID is "U_HEAD" ("header")
2	Record version	2N	Х		"01"
3	Record length	4N	Х		
4	RICS code of the distributing RU	4N	Х	Х	Distributor, producing the tickets
5	Unambiguous key of the tickets	20A	X		The producer can complete this key freely; a specific key can only be used for one ticket. In combination with the RICS code this key provides a global unique key for each ticket within the UIC
6	Edition time	12N	X		Format "DDMMYYYYHHMM" This can be used to prevent fraud by buying a ticket after trip departure (only shortly before the conductor shows up)
7	Flags	1N	X	Х	- International ticket: 1 - Edited by agent: 2 - Specimen: 4 The field is the decimal representation of the sum according to the flags set. E.g.: "6" means national ticket, edited by agent, specimen
8	Edition language of the tickets	2A	Х	Х	ISO 639 - 1 (see Bibliography - page 78) country code definitions and abbreviations
9	Second language of the contract of carriage (See UIC Leaflet 918-2)	2A	Х	Х	ISO 639 - 1 country code. If no second language is used, this field is filled with blanks



8.4 - Definition of the record types for the ticket data according to the UIC standard

In this chapter the record types containing the actual information of online tickets (print attributes) are defined. These contents allow the essential control of the ticket by means of a control apparatus.

Record of the ticket data "Ticket Layout" (U_TLAY)

This record is mandatory in DSTs in accordance with *UIC Leaflet 918-1*, and for international tickets it's mandatory that the layout standard used is "RCT2" (see element 4 - page 54).

This record represents the entire information of the attribute fields on the printed ticket layout, so that a complete control of the ticket is possible without making an online connection to the vending system.

Note that only layout fields with variable content should be included in this record. Fields which have the same content for all tickets of a given layout standard (e.g. labels), will be completed by the control apparatus. In particular for "RCT 2" based layouts all labels on line 5 (E) may not be included.

To control offline, the entire content of the "ticket layout" field is extracted from the DST and shown on the display of the control apparatus. The layout must correspond exactly with the printed ticket.

This record only refers to the ticket content and not to a specific layout standard (for example "RCT 2"). As a consequence, also tickets that are not standardized in the UIC, can be depicted. In combination with the DST records specific for the TCO (see point 5.5 - page 29), DSTs can therefore be created for any carrier specific ticket. Nevertheless international tickets always must follow the "RCT2" layout standard.

Number in sequence	Element	Number of characters	Mandatory	Code	Comments
1	Record ID	6A	Х	Х	ID is "U_TLAY"("Ticket layout")
2	Record version	2N	Х		"01"
3	Record length	4N	Х		
4	Layout standard	4A	Х		For example "RCT2"
5	Number of fields	4N	Х		Number of following fields
The following elements define the individual text fields included on the ticket layout description formula. For each text field the elements are repeated (i= index of the text fields)					
6 + 6 i	Field line	2N	Х		Line index of the first letter. Range: 0 till 14
7 + 6 i	Field column	2N	Х		Column index of the first letter. Range: 0 till 71
8 + 6 i	Field height	2N	Х		Number of lines reserved from the field
9 + 6 i	Field width	2N	Х		Number of columns reserved from the field



Number in sequence	Element	Number of characters	Mandatory	Code	Comments
10 + 6 i	Field formatting	1N	X	X	0: normal 1: bold 2: italic 3: bold & italic 4: small font (the "132-font" in RCT-2) 5: small + bold 6: small + italic 7: small + bold + italic
11 + 6 i	Field text length	4N	Х		Length of the following text. Caution: the length must be determined using the already encoded text
12 + 6 i	Field text	nA	X		If "Field height" is bigger than 1, the text must be wrapped using the following rules: - The first word that doesn't fit in the current field line, is printed at the beginning of the following line - If the field text contains the sign LF (ASCII "10"), the next word must be wrapped to the next line The producer of the record must guarantee that the entire text, when applying these rules, fits within the indicated field sizes (height and width), can be entirely displayed


- **NB**: When composing this record, one must pay attention to the fact that pictograms obviously can't be used in a field text. If the printed ticket contains pictograms, they must be replaced by a corresponding text. The language and content which are used to replace the pictograms must be set according to the standard that is used for the "Ticket layout" field (i.e. "RCT-2").
 - Using "small font" formatting has no impact on the number of characters possible for a certain field. E.g. a field using "small font" formatting still has a maximum width of 71 characters, even if there is space left on the form. The "small font" format is therefore a pure formatting option which can't be used to increase the textual capacity of the ticket fields.



8.4.1 - Extraction of RCT 2 zones

If the element "Layout standard" in the "U_TLAY" record contains the value "RCT2", it means that the content of the "U_TLAY" record is composed according to the layout defined by *UIC Leaflet 918-3*. This allows extracting directly specific ticket attributes from the "U_TLAY" record.

The layout of the ticket according to RCT2 is subdivided in different zones containing distinct attributes (see *UIC Leaflet 918-2, point 1.2.3*):

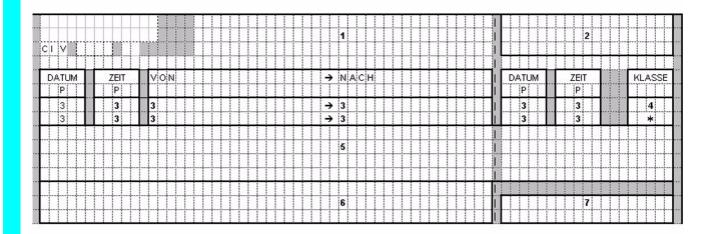

Zone	Content	Only 1 representation
1	Type of document, CIV, responsible carrier in code, obliteration stamp, validity	
2	Names / first names of the travellers and the number of adults and children	
3	Travel distance, departure date and time, arrival date and time	yes
4	Class	yes
5	Train, wagon, reserved seat (if not with compulsory reservation)	
6	Used rates, used commercial conditions (from 1 till n carriers)	
7	Currency (ISO code out of GIV) and total amount for each ticket	yes

If the element "Layout standard" in the "U_TLAY" record contains the value "RCT2", separate zones (1 till 7) can be extracted on the basis of the subdivision of the ticket layout (from the record "U_TLAY"). This allows subdividing the information included in the "U_TLAY" record into coherent parts.

The subdivision in separate zones makes it possible to show the content of the "U_TLAY" record on the display of a control apparatus that is too small for the entire layout. In this case, the separate RCT 2 zones can be displayed consecutively and or combined differently.



8.4.2 - Extraction of RCT2 ticket attributes

Beside the subdivision of the zones, the *UIC Leaflet 918-2* standard allows the extraction of separate ticket attributes (from the "U_TLAY" record). In the zones 3, 4 and 7 only one representation exists for all the different types of transport documents (see last column of the previous table). This means that the included ticket attributes are identical for all RCT 2 ticket types and these attributes can be extracted unambiguously.

The attributes that can be extracted are the following:

Zone 3: Travelling distance and time

Ticket atttribute
Outward journey date of departure
Outward journey time of departure
Outward journey station of departure (Text form)
Outward journey station of arrival (Text form)
Outward journey date of arrival
Outward journey time of arrival
Return journey date of departure
Return journey time of departure
Return journey station of departure (Text form)
Return journey station of arrival (Text form)
Return journey date of arrival
Return journey time of arrival

Zone 4: class

Ticket attribute	
Class	

Zone 5: route

Ticket attribute			
Route outward journey			
Route return journey			

57 918-3



Zone 7: monetary unit and amount

Ticket attribute
Monetary unit (abbreviation)
Amount
Mode of payment

8.5 - Record types for ticket data in accordance with the standards of a specific TCO

The distributing RU can include attributes in the DST that are not defined in the UIC standard. The DST can also be used for national tickets that are not composed according to UIC layout standards.

For these cases the RU can define their own record types. As long as the base structure of the record is respected (see point 8.2 - page 52 "Definition of the record structure"), no other directives for the internal composition of this record exist.

Number in sequence	Element	Number of characters	Mandatory	Code	Comments
1	Record ID	6A	X	X	RICS code of 4 characters + ID (2 characters) The RICS code is the company code of the TCO defining the specific record type. The ID is composed by the TCO himself and contains 2 alphabetic signs that can be chosen freely
2	Record version	2N	X		
3	Record length	4N	X		
		А	Х		Next there are the actual elements of the record in accordance to the standard specific for the TCO

Example of an ID "1180XY" record:

Example of symbol	Meaning
"1180"	RICS code of the DB
"XY"	ID of 2 characters to distinct different record types of a TCO



8.6 - Definition of the entire DST message structure

The DST message structure is defined below. Similar to the record definitions it containes header elements containing type ID and version.

The entire content of the DST is protected by means of a digital signature, that guarantees:

- Integrity:
 - Even the smallest possible manipulation of the content (i.e. changing from 1st to 2nd class) leads to an invalid signature. Forged DSTs will be recognized immediately by verifying the signature.
- Authenticity:
 Since only the possessor of the private key is able to create the signature, the authorship of the DST is proved.

Because the key necessary for the control of the signature can not be fully protected against theft (due to its presence on each control apparatus), an asymmetric algorithm is used (public/private key). The message header thus contains a signature generated from the algorithm DSA ("digital signature algorithm", see FIPS186 - Bibliography page 78).

Definition of the entire DST message structure:

Number in sequence	Element	Number of characters	Mandatory	Code	Comments
1	Unique Message type ID	ЗА	X	Х	"#UT" for UIC Ticket
2	Message type version	2N	X		"01" (Version of <i>UIC Leaflet 918-3</i>)
3	RICS Code of the RU that is signing	4N	Х	Х	Allows the identification of the public key necessary for the verification in combination with the following element
4	ID of the signature key	5A	Х		The ID must be managed by the RU issuing the signature key
5	Signature	50A	X		DSA signature for the message after compression (next element) in ASN.1 representation. If the actual ASN.1 representation is shorter than 50 bytes, it should be enlarged to the length of 50 by adding null bytes
6	Length of compressed message	4N	Х		
7	Compressed message	А	Х		The entire record sequence compressed with DEFLATE



8.7 - 2D Barcode symbol

When the DST is edited as a 2D barcode, the following specifications are mandatory:

Parameter	Value	Comments				
Symbology used	Aztec	Specification, see <i>AIMBC13</i> - Bibliography page 78				
Number of modules	87	This means 17 Aztec layers (see Aztec standard)				
Capacity	max. 621 Bytes	Binary data (8 bit). This limit may not be exceeded; otherwise the fault correction is jeopardized. If necessary, optional DST records must be omitted				
Physical size	The size of the entire 2D barcode results from the recommended element size for the printout on the home printers (inkjet lowcost):					
		Optimal recommendation: 25 mil/ elem.				
		Minimal recommendation: 15 mil/ elem.				
		(with 50 x 50 mm results in an element size of 23 mil)				
		1 111111 = 40 11111				
Share of fault correction data	23 %	This value results from the previous values when using the full capacity.				
		For Aztec 23% is the standard value for fault correction				

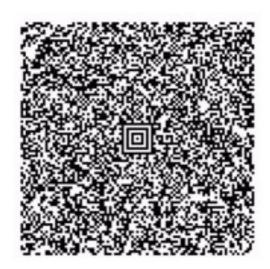


Fig. 36 - Example for 2D Barcode symbology in accordance with specification



8.8 - Key management

8.8.1 - Duration of validity of the signature key

Since the signature algorithm DSA is an asymmetric and robust cryptographic procedure, the key pairs must in general be rarely switched. A relative long duration of validity can be chosen.

The maximum duration (e.g. 12 months) is defined in each bilateral agreement.

Tickets can be valid over longer periods (e.g. 2 months or more) and only one signature per ticket is possible, therefore the validity periods of subsequent keys must overlap. The overlap period must be at least as long as the maximum ticket validity time span (minus 1 day).

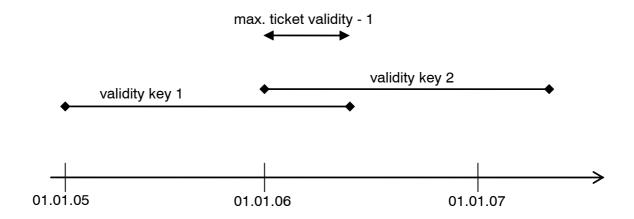


Fig. 37 - Example for key validity overlap

8.8.2 - Test key pairs

Some testing scenarios can require a special set of keys, which are used on pre productive system plattforms. Since productive ("live") private keys usually can't be deployed to testing platforms for security reasons, special testing key pairs must be used in this context. Testing keys must have an ID beginning with "TT" (for details about the key ID see point 8.6, element 4 "ID of the signature key" - page 59).

Sample for a test key ID: "TT001".

The test key pairs are deployed on test environments, which usually can't guarantee a defined security level. Due to this situation it is very important to be aware that tickets signed using a test key can never be considered as valid, even if the specimen flag of the DST message is not set. It is the responsibility of each TCO to ensure that their controlling devices follow this policy and always display these tickets with the indication "Test" or "Specimen".

On the other hand the ticket distributor is fully responsible to guarantee the secrecy of its productive private keys. Any ticket signed with a non-test private key will be considered as authentic by a TCO.



8.8.3 - Exchange of signature keys (public keys) with partner companies

The period of validity of a key pair is defined in each bilateral agreement. Since the public keys must be distributed on the control apparatus of the different RUs, the exchange of a key must take place in advance of its validity time span.

The public keys must be at the disposal of the different RUs at the dates defined in the bilateral agreements.

The message format and communication infrastructure used to transfer the public keys is defined in the bilateral agreements. The use of key certificates (signed by a certification authority) can be agreed bilaterally.



9 - Option: list with cancelled certificates (CMC, CKC)

Cancelling the tickets using the standard in a system with a (supplementary) check where ticket info is checked versus stored information).

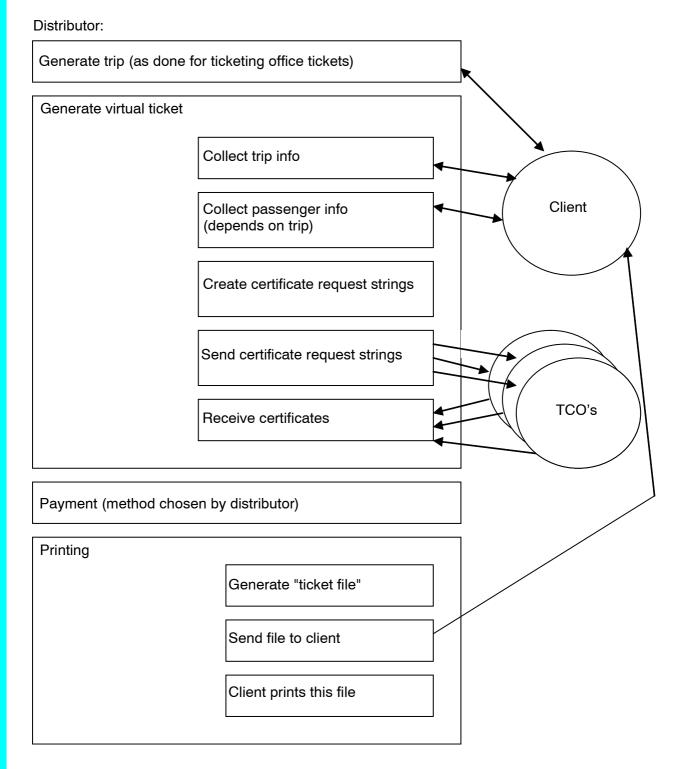


Fig. 38 - The home-printed ticketing scheme

63 918-3



If in the payment-phase or in the printing-phase something goes wrong, the ticket will be cancelled (everything created in the "generate ticket phase"). The certificates that were made by the TCOs (in case of CMC or CKC) (see List of abbreviations - page 76) or by the distributor (DST) will not be used on a ticket.

Since several RUs are using a closed system, it can be interesting to communicate which of their generated certificates can/cannot be used on the tickets. A system like this can prevent that cancelled or used tickets are being used or used again.

To do this, the distributor can send the TCO a list of all the reference numbers (numbers of the distributor when demanding the certificate) that cannot be used because the ticket has been cancelled or has not been paid (because there is a problem with the payment by credit card or a problem with the creation of other certificates of other TCOs causing a cancellation of the transaction).

The cancellation of the tickets in the reservation system has nothing to do with this cancellation and must be done separately (cancellation of the "generate trip" phase).

In case of a CKC-system, these cancellation messages are very likely to be used, but even in the CMC-system it can be applied.

Definition of the cancellation message:

Number in sequence	Element	Number of characters	Mandatory	Code	Numeric	Comments		
1	Message type	2	X	Х		ID is "CA" (cancellation)		
2	Number of records	5	Х		Х			
The following 3 elements describe the records, corresponding with certificate requests to be cancelled. For each certificate request the elements are repeated (i= index of text field).								
3 + 3 i	Sequence number of record	5	Х		Х			
4 + 3 i	Certificate Request ID	20	Х					
5 + 3 i	TCO transaction ID	20	Х			In case the distributor received an answer from the TCO		



10 - Procedure for making home-printed tickets

- Client logs in to www.mydistributor.com;
- Client chooses his voyage (itinerary depends on timetable, date, number of persons travelling,...);
- Distributor proposes a price (possibly he has to consult several carriers when global prices depend on the availability);
- Client chooses;
- Distributor generates the ticket according to the *UIC Leaflet 918-2* layout;
- Distributor knows the TCOs and the elements they use to generate their certificates;
- Distributor makes a list of all the data he needs from the client in order to have the certificates generated for/by¹ every TCO;
- Distributor collects these data;
- Distributor sends the TCOs in question all the elements they need to generate their certificates¹;
- Distributor generates the certificates using DST with the keys as defined in the bilateral agreements²;
- The TCOs return their certificates to the distributors¹;
- When there are error messages or time-outs: STOP¹;
- Generate the A4-ticket;
- Payment by the client;
- The A4-ticket is sent to the client by the distributor.

1. CMC, CKC

DST

65 918-3



11 - Checklist for a bilateral agreement between distributor & TCO

In the Bilateral Agreement the following elements should figure:

11.1 - Parties to the agreement

Distributor and,

TCO

11.2 - Purpose of the agreement

11.2.1 - Sale and control of IRTHP

.....

11.2.2 - Tickets to be sold

What kind of tickets can be made?

What are the O/D-combinations that can be made on a home-printed ticket?

Is there for instance a minimum distance or a specific kind of train (e.g. high-speed train)?

Can this ticket only be sold with a reservation?

Or are open tickets also possible? For what kind of passengers?

Can multiple segments figure on one ticket?

Can we have more than one passenger on one ticket?

11.2.3 - Distribution channels

Distribution channels allowed

11.3 - Issuing of the tickets

11.3.1 - Steps to manufacture an IRTHP

Different steps the client and the distributor have to go through to manufacture a ticket? Who is responsible for which part?



11.3.2 - Identification cards accepted

Cards accepted in case of a certificate, generated based on a card number (see Appendix A - page 71) (to be added to the bilateral agreement and updated on a regular base). In case of a credit-card: which characters of the card number can be printed on the ticket?

Elements used to check and create the certificate (age, O/D, ...)

11.3.3 - Conditions of use of the tickets

Conditions of use of the ticket, including information to be given to the client (non-refundable, non-exchangable, ...).

Conditions of use (or other messages for the client) to be printed on the ticket.

How many time in advance can a ticket be sold?

Language(s) used on the ticket.

11.4 - Ticket Layout

Layout: which data will appear on the ticket (reference to UIC Leaflet 918-2)?

How are they formulated?

What can (not) emerge on the ticket?

How much liberty the distributor has to integrate other information on his tickets?

Which information can not be printed, even in the free distributor zone? (e.g. publicity for competitors)

Must the distributor send to the TCO in advance the publicity messages for acceptance?

Can the distributor put a picture in the background of the adapted 918-2 zone?

Colors / Fonts / Logos to be used on the ticket.

11.5 - Certificates

What kind of certificate(s) is/are used?

This part describes how the TCO must transfer the security information to the distributor in order to add this information to the ticket.

Define the options (kind of barcode to be used or the standard in case of a 1D-barcode).

Layout of the certificate: bar-code (which standard?), 2D barcode of alphanumerical (text)?

67



11.6 - Technical Aspects

Define the servernames/serverdomains. This sounds logical but often the IT infrastructure is owned by a third party with his own domain names, server names, addresses, ...

Mechanism:

how must the distributor produce a ticket and what can he do on his own?

For which parts must he contact one or more TCOs?

What mechanism is used to generate the certificates (CMC, CKC, DST)?

What are the elements, used to generate such a ticket?

Messaging: exceptions

What if there is no connection?

How the TCO and the distributor can exchange more essential information by means of extra messages via the back-office? e.g. to have necessary backoffice and accounting info.

What is the fallback procedure?

When should this fallback procedure be used?

Which error-codes can appear in the communication between the distributor and the TCO? (see Appendix B - page 72)

Fall-back scenario in case of a technical problem.

How can a sales transaction be cancelled (see list in Appendix D - page 74)?

What is the procedure of a cancellation during the sales process?

Must the distributor send immediately the certificates he received but did not use ("Cancellation Message") or should he do this at the end of the day/week/month in a list? (this depends on the system used by the TCO (open system vs closed system).

Response time to get an answer.

Define test key pairs (DST), test messages (for instance to check response times) + the frequency they may use (to avoid too much overhead in the communication).

Time the systems can be down (corrective and other maintenance)

Period that info should be stored on disk (back-up and/or archive)



11.7 - Web Content

Disclaimer, to be used on the website (legal aspects)

Language(s) used on the website

Information (legal aspects) conditions of use of the website and of the tickets to be shown to the client on the website

Colors / Fonts / Logos to be used on the website

Minimal technical conditions for printing at home (paper to be used, minimal technical conditions to be asked to fulfil by the client)

11.8 - Back office transactions

How are back-office transactions done - via the issuing distributor? Or is it allowed via other distributors too?

11.9 - Duration, termination, modification

11.9.1 - Entry into force

11.9.2 - End of agreement

11.9.3 - Modification of the offer

Definition of the process for introducing or modifying an offer, e.g. required offer specifications (O/D's, trains, number of tickets, reservation mandatory or not, class, fare structure, ...). Time limit for information of the involved partners.

11.9.4 - Modification of the agreement

11.10 - Contractual basis

CIV, GTC-CIV, GTT-CIV, GTV-CIT for tickets

UIC Leaflet 918-2 for ticket layout

UIC Leaflet 918-3 for IRTHP



11.11 - Liability
For data (distributor)
For certificate (TCO)
For website (Distributor)
For printing (client)
11.12 - Contract managers
Should be defined for each party to this agreement (not the client)
11.13 - Final provisions
Language of agreement
Applicable law
Jurisdiction
Interpretation and treatment of omissions
Duty of confidentiality
Place, date
Signature of (Distributor)
Place, date
Signature of (TCO)



Appendix A - The accepted card types and abbreviation

Card code	Card type	Extra information
VISA	VISA	only some digits are shown, rest: x (to avoid fraud) - e.g. If the card number is:
MAST	Mastercard	4589 3453 2342 1232 there appears only
AMEX	American Express	xxxx xxxx xxxx 1232
EUID	European Identity Card	
BAHN	Bahn Card (DB)	
THLS	Lys-card on Thalys	
RAIL	Railplus	

NB: This is an open list, other cards can be added via the person responsible for this leaflet at the UIC.



Appendix B - Error codes and error messages

Error code	Error message
01	Train not possible
02	Client = blacklisted
03	System down
04	Insufficient parameters
05	Incompatible parameters



Appendix C - Layout of the certificate

Code	Layout of the certificate
TEXT	ASCII-code
30F9	3 of 9 barcode
AZTXYZ	2D-barcode type AZTEC XYZ
CHIP	Chipcard



Appendix D - Cancellation reasons

Code	Reason
ТО	Time out
NA	No answer from TCO
NAOXXXX	No Answer from Other TCO, XXXX = code of TCO (UIC Leaflet 920-1)
TAC	Annulation of ticket by client
TAD	Annulation of ticket by distributor
PI	Procedure interrupted



Appendix E - XML messages - layout (CMC, CKC)

E.1 - Certificate Request - Message



(see also fig. 23 - page 32 Class diagram: Certificate Request_Message)

CR.DOC (see UIC Website: http://www.uic.asso.fr/ Activities / Passenger / Distribution & systems / Passengers Messages Management Group (GMP) / Leaflets / 918-3 / Schema A)

E.2 - Certificate Transfer - Message



(see also fig. 24 - page 33 Class diagram: Certificate Transfer Message)

CT.DOC (see UIC Website: http://www.uic.asso.fr/ Activities / Passenger / Distribution & systems / Passengers Messages Management Group (GMP) / Leaflets / 918-3 / Schema B)

E.3 - Cancellation Message



(see also fig. 25 - page 34 Class diagram: Cancellation Message)

CM.DOC (see UIC Website: http://www.uic.asso.fr/ Activities / Passenger / Distribution & systems / Passengers Messages Management Group (GMP) / Leaflets / 918-3 / Schema C)

E.4 - Cancellation Acknowledgement



(see also fig. 26 - page 35 Class diagram: Cancellation Acknowledgement Message)

CA.DOC (see UIC Website: http://www.uic.asso.fr/ Activities / Passenger / Distribution & systems / Passengers Messages Management Group (GMP) / Leaflets / 918-3 / Schema D)

75 918-3



List of abbreviations

ASCII American Standard Code for Information Interchange: a character set

and encoding

ASN.1 Abstract Syntax Notation one, see ISO/IEC 8824

CA Cancellation Acknowledgement (Message)

CIT International Railway Transport Committee

CIV Uniform rules concerning the contract of international carriage of

passengers by rail

CKC Carrier Keeps Contract

CM Cancellation Message

CMC Carrier Makes Certificate

CR Certificate Request (Message)

CT Certificate Transfer (Message)

DSA Digital signature algorithm, see [FIPS186]

DST Digitally Signed Ticket

EDIFACT Electronic Data Interchange For Administration, Commerce and

Transport, see ISO 9735

GBF Groupe Billetterie Ferroviaire

GBI Groupe Billetterie Innovante (UIC work group)

GTC-CIV General Terms and conditions for the international carriage of

passengers by rail

GTT-CIV CIV ticket manual

GTV-CIT CIV passenger traffic manual

H2H Host to host - coding using a bilateral agreed standard

IRTHP International Rail Ticket for Home Printing

ISO International Organisation for Standardisation

O/D Origin / Destination

PET Paperless Electronic Ticketing



PKI Public Key Infrastructure

RICS code Railway Interchange Coding System

code to identify a (railway) company

RU Railway Undertaking

TCO Ticket Controlling Organisation

UIC International Union of Railways

UTF-8 Unicode Transformation Format

variable-length character encoding for Unicode data, see [RFC3629]

XML eXtended Markup Language

W3C-recommended general-purpose markup language

1D barcode 1 dimensional barcode (uses vertical bars for data encoding)

2D barcode 2 dimensional barcode (uses a 2 dimensional matrix for data encoding)



Bibliography

1. UIC leaflets

International Union of Railways (UIC)

UIC Leaflet 419-1: Analytical numbering of international passenger trains, 2nd edition of 1.1.93

UIC Leaflet 918-1: Electronic reservation of seats/berths and electronic production of travel documents - Exchange of messages, 2nd edition, December 2005

UIC Leaflet 918-2: Electronic seat/berth reservation and electronic production of transports documents -Transport documents (RCT2 Standard), 2nd edition, August 2006

UIC leaflet 920-1: Standard numerical coding for railway undertakings, infrastructure managers and others companies involved in rail-transport chains, 6th edition, November 2005

UIC Leaflet 920-2: Standard numerical coding of locations - General Locations File (GLF) - Electronic version, 4th edition of 1.1.89 with 4 Amendments

UIC Leaflet 920-16: Directory of code lists for the passenger domain, (1st edition in course of preparation)

2. International standards

International Organisation for Standardization

ISO 639-1: Codes for the representation of names of languages - Part 1: Alpha 2 code, 2002

3. Miscellaneous

Peter Deutsch

RFC1951 - DEFLATE Compressed Data Format - Specification version 1.3, May 1996

François Yergeau

RFC3629 - UTF-8, a transformation format of ISO 10646, November 2003

Federal Information Processing Standards Publications (FIPS PUBS)

FIPS186 - Digital Signature Standard (DSS), version 1.0, 19 May 1994

Global trade association for automatic identification and mobility (AIM)

ANSI/AIM BC13 ISS - Aztec Code/97/002, November 1997



Warning

No part of this publication may be copied, reproduced or distributed by any means whatsoever, including electronic, except for private and individual use, without the express permission of the International Union of Railways (UIC). The same applies for translation, adaptation or transformation, arrangement or reproduction by any method or procedure whatsoever. The sole exceptions - noting the author's name and the source - are "analyses and brief quotations justified by the critical, argumentative, educational, scientific or informative nature of the publication into which they are incorporated".

(Articles L 122-4 and L122-5 of the French Intellectual Property Code). © International Union of Railways (UIC) - Paris, 2007

Printed by the International Union of Railways (UIC) 16, rue Jean Rey 75015 Paris - France, May 2007 Dépôt Légal May 2007

ISBN 2-7461-XXXX (French version)

ISBN 2-7461-XXXX (German version)

ISBN 2-7461-1307-4 (English version)