



Standard Test Method for Pin-Type Bearing Test of Metallic Materials¹

This standard is issued under the fixed designation E 238; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last approval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This test method covers a pin-type bearing test of metallic materials to determine bearing yield strength and bearing strength.

NOTE 1—The presence of incidental lubricants on the bearing surfaces may significantly lower the value of bearing yield strength obtained by this method.

1.2 The values stated in inch-pound units are to be regarded as the standard.

1.3 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

2. Referenced Documents

2.1 ASTM Standards:

- E 4 Practices for Force Verification of Testing Machines²
- E 6 Terminology Relating to Methods of Mechanical Testing²
- E 83 Practice for Verification and Classification of Extensometers²

3. Terminology

3.1 Definitions:

3.1.1 *bearing area*—the product of the pin diameter and specimen thickness.

3.1.2 *bearing stress*—the force per unit of bearing area.

3.1.3 *bearing strain*—the ratio of the bearing deformation of the bearing hole, in the direction of the applied force, to the pin diameter.

3.1.4 *bearing yield strength*—the bearing stress at which a material exhibits a specified limiting deviation from the proportionality of bearing stress to bearing strain.

3.1.5 *bearing strength*—the maximum bearing stress which a material is capable of sustaining.

3.1.6 *edge distance*—the distance from the edge of a bearing specimen to the center of the hole in the direction of applied force (Fig. 1).

3.1.7 *edge distance ratio*—the ratio of the edge distance to the pin diameter.

3.1.8 For definitions of other terms see Terminology E 6.

4. Significance and Use

4.1 The data obtained from the bearing test are the bearing ultimate and yield strength. The data provide a measure of the load-carrying capacity of a material edge loaded with a close-fitting cylindrical pin through a hole located a specific distance from the specimen edge.

4.2 Bearing properties are useful in the comparison of materials and design of structures under conditions where the pin is not restricted.

5. Apparatus

5.1 *Testing Machines*—Machines used for bearing testing shall conform to the requirements of Practices E 4.

5.2 *Gripping Devices*—Various types of gripping devices may be used to transmit the measured load applied by the testing machine to the test specimens. Any grips considered to apply the load axially for tension testing, such as pin connections or wedge grips, are satisfactory for use in bearing testing.

5.3 *Pin*—The bearing load is generally applied to the specimen through a close-fitting cylindrical pin. The pin shall be harder and stronger than the material being tested. Restraint of movement of the specimen where it is in contact with the pin has a considerable effect upon the hole deformation obtained as a function of the load applied. Close control of surface conditions on both the specimen and pin is needed to assure reproducible results. The pins used should be uniform in diameter, hardness, and surface roughness. Pin materials, hardness, and surface roughness as shown in Table 1 are recommended for testing the materials listed. The pin should be checked carefully after each test to ensure that no metallic residue adheres to it and that it is both straight and undeformed. If there is any question regarding its quality it should be replaced.

5.4 *Pin Support*—The jig supporting the pin should position the pin concentric with the hole in the specimen. It should not restrain the thickening of the specimen as the load from the pin deforms the hole. Bending of the pin should be kept to a

¹ This test method is under the jurisdiction of ASTM Committee E28 on Mechanical Testing and is the direct responsibility of Subcommittee E 28.05 on Compression Testing.

Current edition approved July 27, 1984. Published November 1984. Originally published as E 238 – 64. Last previous edition E 238 – 68 (1978).

² *Annual Book of ASTM Standards*, Vol 03.01.

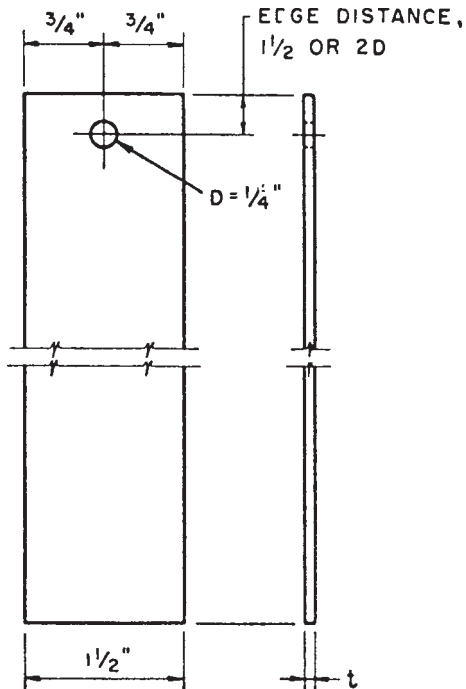


FIG. 1 Bearing Test Specimen

TABLE 1 Characteristics of Pin for Various Materials Tested

Material Tested	Material	Rockwell Hardness	Surface Roughness, μ in. (μ m) (avg)
Aluminum alloys	hardened steel	C60 to 64	4 to 8 (0.1 to 0.2 μ m)
Beryllium alloys	hardened steel	C60 to 64	4 to 8 (0.1 to 0.2 μ m)
Copper alloys	hardened steel	C60 to 64	4 to 8 (0.1 to 0.2 μ m)
Magnesium alloys	hardened steel	C60 to 64	4 to 8 (0.1 to 0.2 μ m)
Zinc alloys	hardened steel	C60 to 64	4 to 8 (0.1 to 0.2 μ m)

specimen. Fig. 2 and Fig. 3 show examples of the types of jig that have been used and are considered satisfactory.

5.5 *Extensometers*—Extensometers used for measuring the bearing deformation shall comply with the requirements for Class B-2 or better as described in Practice E 83. The bearing deformation measurement shall be made in a manner to obtain the axial bearing deformation with a minimum of other deformations being included such as the bending of the pin and tensile strain in the specimen. Fig. 2 shows an adaptation of a Templin extensometer system to record bearing deformation. Fig. 3 illustrates a mechanism that can be used to transfer the bearing deformation so it can be measured with the same extensometers used for tension testing. A method of measuring bearing deformation featuring two linear differential transformers is shown in Fig. 4.

6. Test Specimens

6.1 *Specimen Dimensions*—The specimen shall be a flat sheet type, with the full thickness of the product being used if possible. If the specimen is too thick in relation to the pin diameter, the pin is liable to bend considerably or break before the bearing strength is obtained. If a specimen is too thin, buckling may occur. A ratio of pin diameter to specimen thickness of from 2 to 4 has been used to avoid both conditions. The hole should have approximately the same diameter as for the intended use. For example, if the bearing test results are being used to obtain data for a riveted part, a hole $3/16$ in. or $1/4$ in. (5 or 6 mm) in diameter would be suitable, while for a bolted assembly, a larger hole might be desirable. A difference in test results may be obtained with holes of different diameters. The width of the specimen should be about 4 to 8 times the hole diameter. The edge distance ratio shall be specified and the edge distance held within a tolerance of $\pm 2\%$. Edge distance ratios of $1\frac{1}{2}$ and 2 are commonly used (see Fig. 1). A close fit between the specimen and pin is required since a loose

minimum by having the jig support the pin close to the

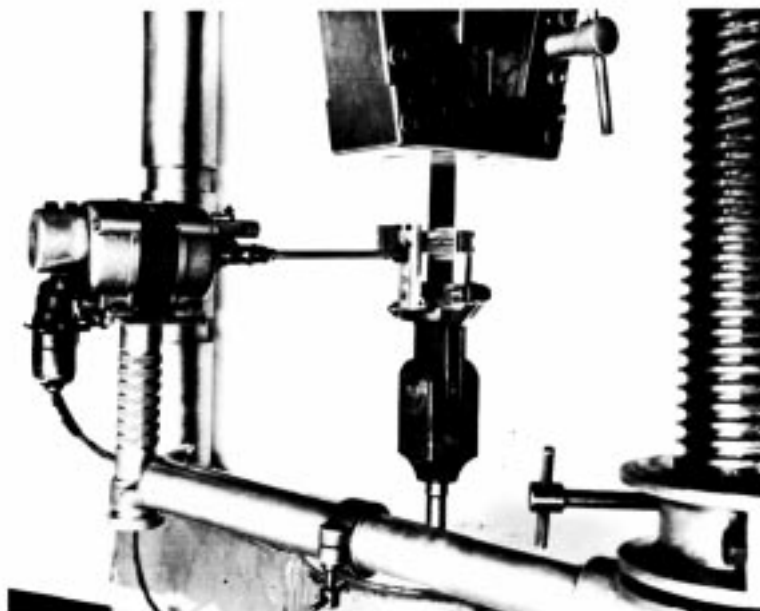


FIG. 2 Bearing Test Fixture Used on Aluminum Sheet

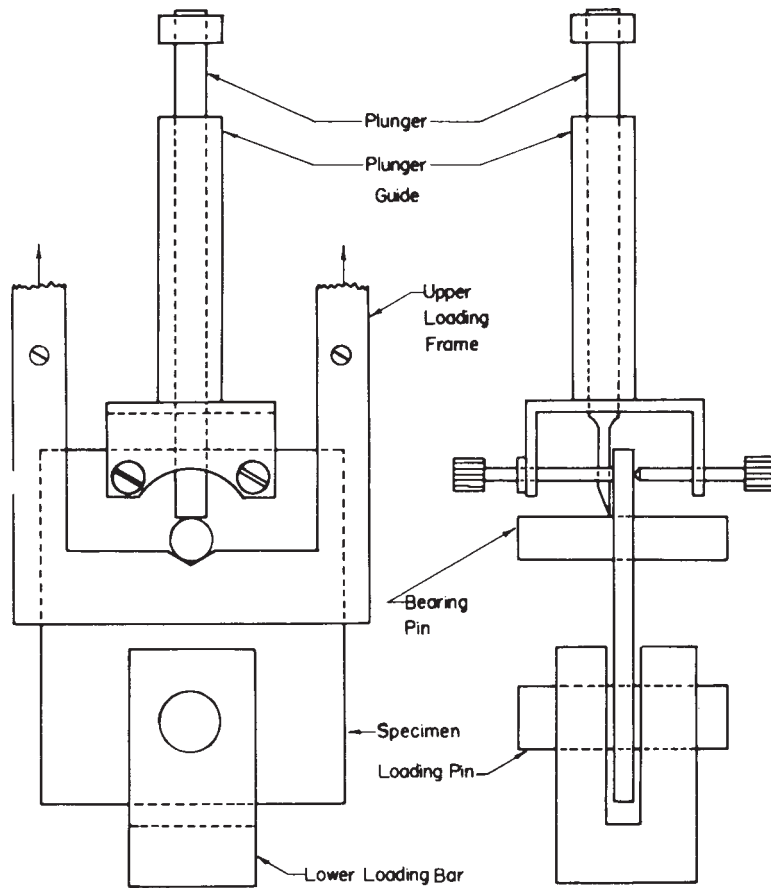


FIG. 3 Schematic Drawing of Bearing Deformation Transfer Device

fit will tend to give lower results. The diameter of the hole should not exceed the pin diameter by more than 0.001 in. (0.02 mm). The total length of the test specimen is not critical and may depend on the method used to grip the specimen. Fig. 1 shows a bearing test specimen commonly used.

6.2 *Specimen Preparation*—A flat specimen with a hole normal to the face shall be used. A smooth, round hole with a minimum of cold work on the surface must be obtained. The finished hole is generally bored, reamed, or ground as a final operation to obtain the desired degree of roundness. Any burr on the periphery of the hole is indicative of a cold-worked surface on the hole and should be avoided. Removal of the burr will not eliminate the cold work.

7. Procedure

7.1 *Measurement of Specimens*—Measure the actual thickness of the specimen and the pin diameter, preferably reading to at least the nearest 0.5 % of the dimension measured, and in any case to at least the nearest 0.001 in. (0.02 mm). Calculate the stress on the basis of the measured dimensions. Measure the edge distance to the nearest 0.01 in. (0.2 mm).

7.2 *Cleaning*—Clean the specimen, pin, and adjacent areas of the jig of all foreign matter and contamination, especially lubricants, prior to assembly. Keep in that condition until the test is completed. It has been found that oil from human fingers touching the pin significantly lowers the results of the test. A handle on the pin has been found to help in keeping fingers

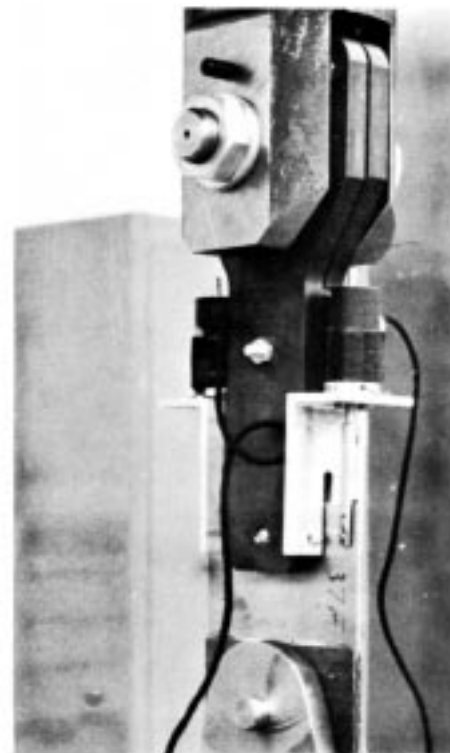


FIG. 4 Autographic Measurement of Bearing Deformation

from touching the test area of the pin. Recommended methods of cleaning are given in the Appendix X1.³ The cleaners recommended for the materials given in the Appendix X1 are generally satisfactory for cleaning the pin and fixtures, too.

7.3 *Testing*—Load the specimen and obtain simultaneous readings of the load and bearing deformation. Any convenient method of load application and system of strain recording may be used. Autographic strain recording equipment can be readily adapted to measure bearing deformation (see Figs. 1-5).

7.4 Conduct the tests at a controlled rate of straining or loading. The recommended rate for metallic materials is 0.05 bearing strain per minute. If a testing speed other than a strain rate of 0.05/min is used, report this fact.

8. Determination of Bearing Yield Strength

8.1 Determine the bearing yield strength from a graph of the bearing load versus bearing deformation. Fig. 5 is an illustration of such a graph. Calculate the yield strength from the load at an offset from the initial straight-line portion of the graph equal to 2 % of the pin diameter. Calculate the stress by dividing the load by the bearing area.

9. Determination of Bearing Strength

9.1 Calculate the bearing strength by dividing the maximum load carried by the specimen by the bearing area.

10. Report

- 10.1 The report shall include the following:
 - 10.1.1 Material tested and direction of test,
 - 10.1.2 Hole diameter, width, and thickness of specimen.
 - 10.1.3 Edge distance ratio,
 - 10.1.4 Temperature of testing (if other than at room temperature),
 - 10.1.5 Bearing yield strength,
 - 10.1.6 Bearing strength,
 - 10.1.7 Description of fracture,

³ Stickley, G. W., and Moore, A. A., "Effects of Lubrication and Pin Surface on Bearing Strengths of Aluminum and Magnesium Alloys," *Materials Research & Standards*, MTRSA, Vol 2, No. 9, September 1962, p. 747.

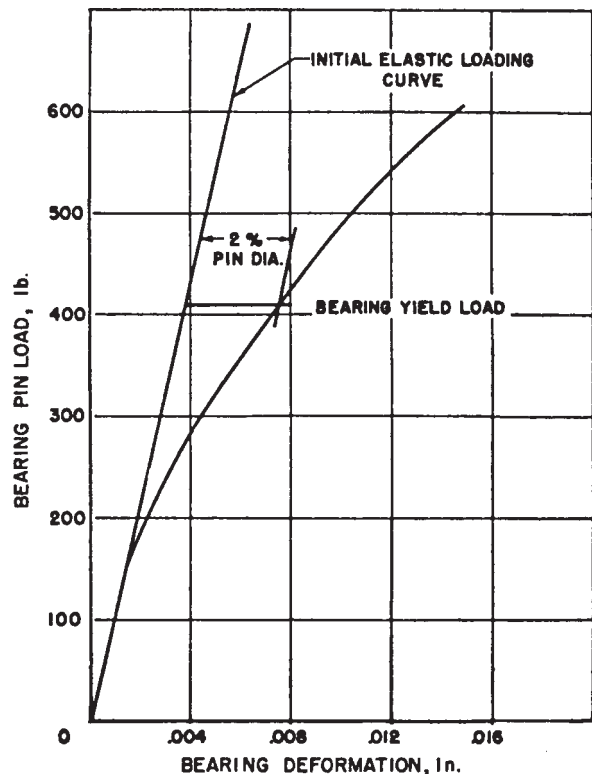


FIG. 5 An Autographic Bearing Load Versus Bearing Deformation Curve on AZ31A-H24 Sheet at Room Temperature

- 10.1.8 Cleaning procedure, and
- 10.1.9 Speed of testing.

11. Precision and Bias

11.1 Because of the limited number of users it is difficult to secure information on precision or bias. Committee E 28 would welcome participants in an interlaboratory study to develop such information on this method.

12. Keywords

12.1 bearing strength; bearing test; bearing yield strength; metallic materials; pin-type

APPENDIX

(Nonmandatory Information)

X1. RECOMMENDED METHODS OF CLEANING

X1.1 Recommended methods of cleaning the bearing test specimen, pin, and support assembly to get uniform test results are given in this Appendix. They are not intended to be exclusive but have been found adequate for the materials indicated.

X1.1.1 *Aluminum Alloys*—Ultrasonic cleaning in a suitable solvent such as acetone.

X1.1.2 *Magnesium Alloys*—Chemical cleaning with a cleaner such as one consisting of 60 g of NaOH plus 10 g of Na₃PO₄ · 12H₂O/L of water at 180 to 200°F.



E 238 – 84 (2002)

ASTM International takes no position respecting the validity of any patent rights asserted in connection with any item mentioned in this standard. Users of this standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, are entirely their own responsibility.

This standard is subject to revision at any time by the responsible technical committee and must be reviewed every five years and if not revised, either reapproved or withdrawn. Your comments are invited either for revision of this standard or for additional standards and should be addressed to ASTM International Headquarters. Your comments will receive careful consideration at a meeting of the responsible technical committee, which you may attend. If you feel that your comments have not received a fair hearing you should make your views known to the ASTM Committee on Standards, at the address shown below.

This standard is copyrighted by ASTM International, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA 19428-2959, United States. Individual reprints (single or multiple copies) of this standard may be obtained by contacting ASTM at the above address or at 610-832-9585 (phone), 610-832-9555 (fax), or service@astm.org (e-mail); or through the ASTM website (www.astm.org).